


記号	改	歴	年月日	担当	承認
△					
△					

NOTE:


INSULATION RESISTANCE - 100 Megaohm min.
 @500 VDC
 CONTACT RESISTANCE - 30 milliohm Max.
 DIELECTRIC STRENGTH - 500 VAC for one minute.
 LIFE CYCLES - 5,000 cycles min.
 OPERATING TEMPERATURE - -40°C to 70°C
 INSERTION/EXTRACTION FORCE - 4 - 20N

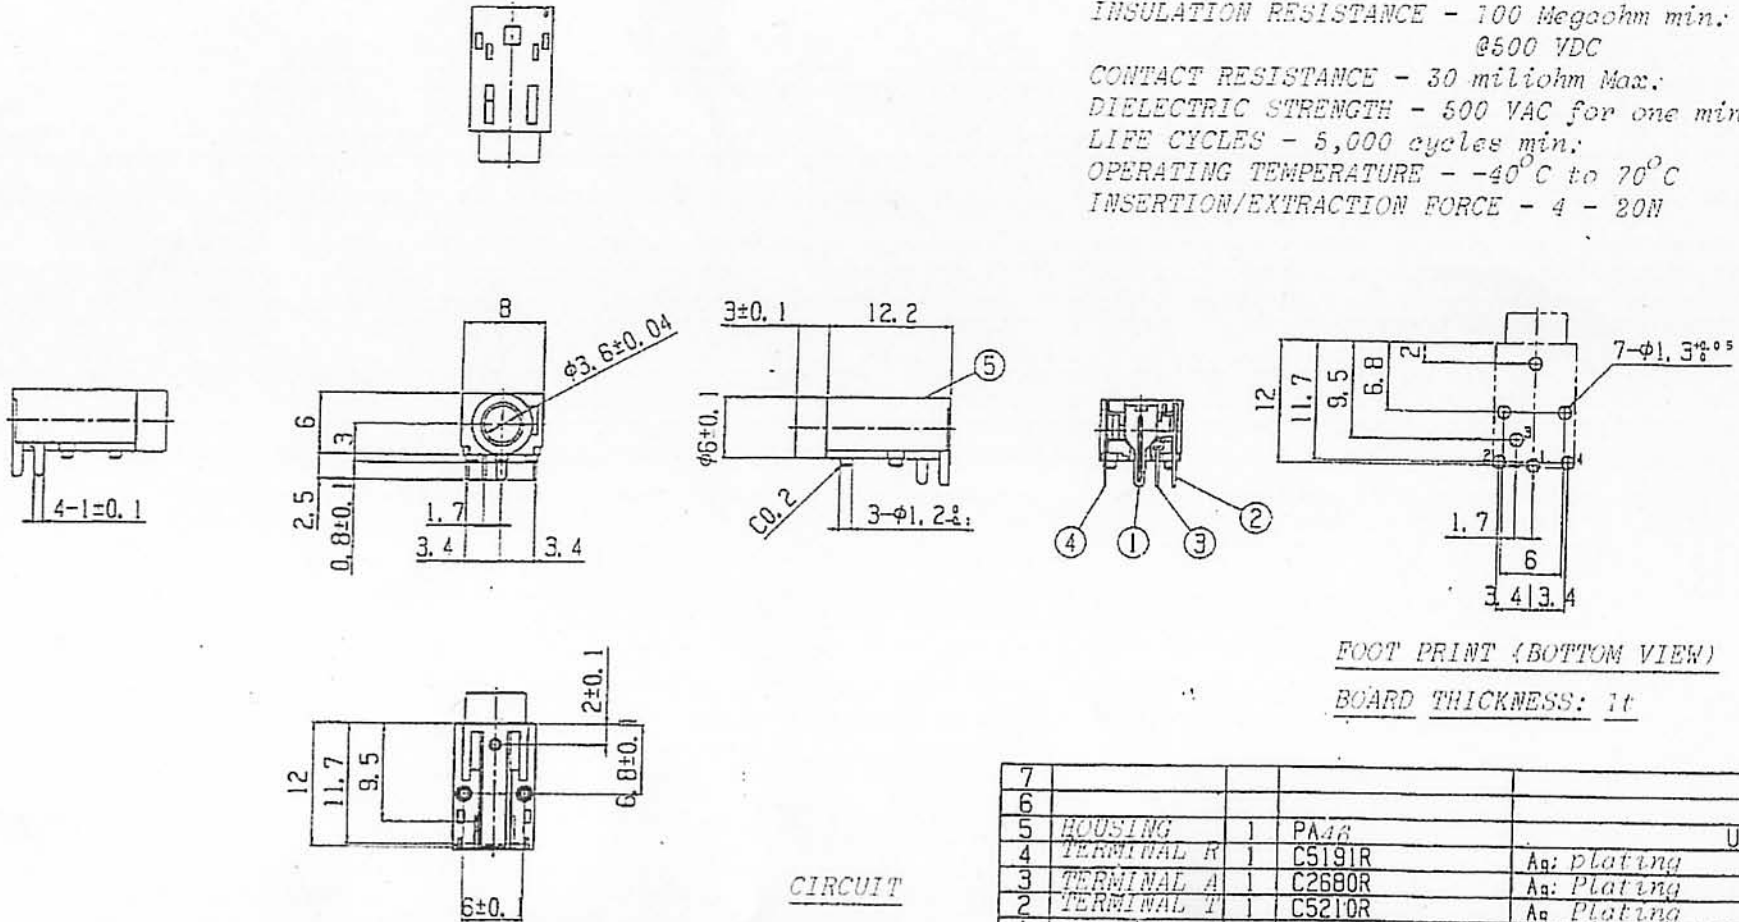

FOOT PRINT (BOTTOM VIEW)

BOARD THICKNESS: 1t

CIRCUIT



7					
6					
5	HOUSING	1	PA46		UL94HB
4	TERMINAL R	1	C5191R	Aq: plating	t0.25
3	TERMINAL A	1	C2680R	Aq: Plating	t0.3
2	TERMINAL T	1	C5210R	Aq: Plating	t0.3
1	TERMINAL E	1	C5191R	Aq: Plating	t0.25
No	PART NAME	QTY	MATERIAL	FINISH	
	備	考	部品番号	弊社品番	
				03-681B0-31BKA	
承認	検閲	設計	ASK	尺度	2/1
重松	重松	OM		作成日	1999.5.24
				図番	K681K0KM
					0