







SPECIFICATIONS:

Contact Resistance
Insulation Resistance
Dielectric Withstand Voltage

:30m Ω max
:100M Ω min. at DC 500V
:AC 500V for one minute



M12XP1.0 METRIC THREAD

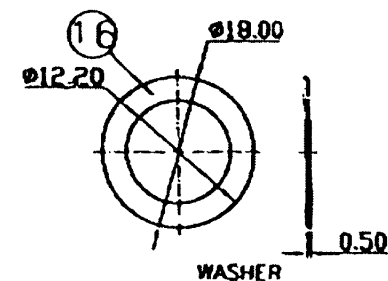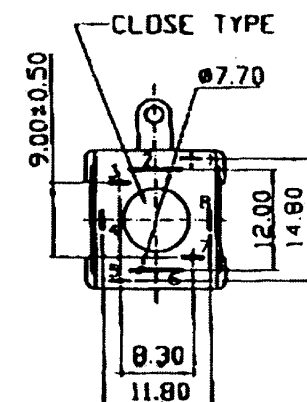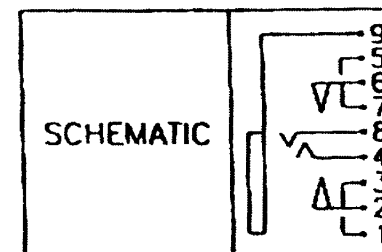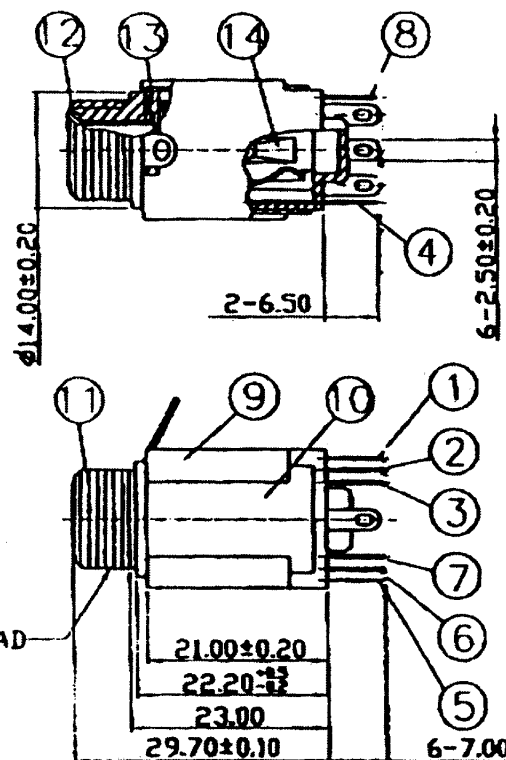

16	Washer	0.5T Steel	1	Nickel Plated
15	Nut	2.0T Steel	1	Nickel Plated
14	Insulator	POM	2	Ivory Color
13	Insulator	Red Vulcanited Fibre	1	Red Color
12	Bushing	Brass	1	Nickel Plated
11	Barre(W/Thread)	PC	1	Black Color
10	Cover	0.5T Steel	1	Nickel Plated
9	Housing	POM	1	Black Color
8	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
7	Transfer Terminal	0.4T Brass	1	Silver Plated
6	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
5	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
4	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
3	Transfer Terminal	0.4T Brass	1	Silver Plated
2	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
1	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

MODEL No.

HEADPHONE JACK No. MJ018E



MARUSHIN ELECTRIC MFG. CO., LTD