
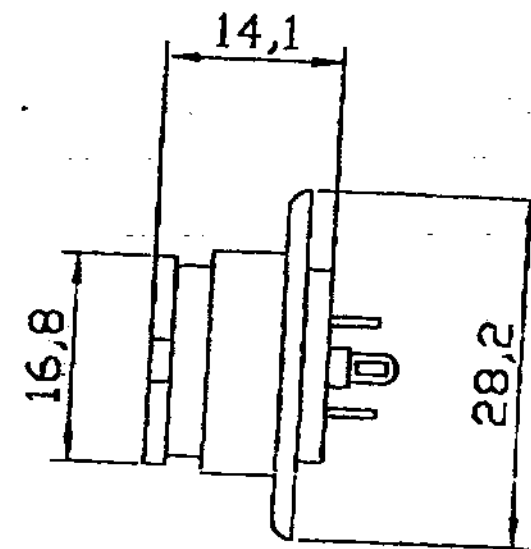


REV. 更改	DESCRIPTION 説明	ENG. 設計人	APPROVAL 審査

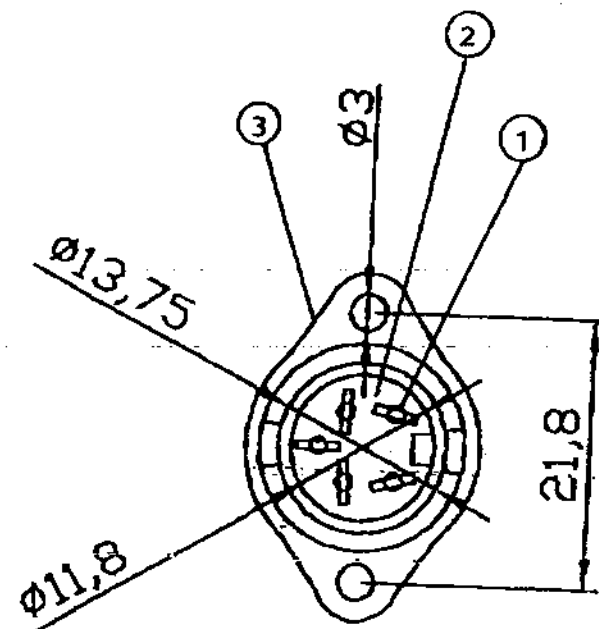

ELECTRONIC SPEC:

INSULATION RESISTANCE: 100M OHM AT 500V DC
 DIELECTRIC STRENGTH: 1000V AC/1 MIN.
 CONTACT RESISTANCE: 20M OHM MAX.
 PATING: 100V AC 2A

3.SHELL:	ZINC,NICKEL PLATED.
2.HOUSING:	NYLON.
1.PIN:	BRONZE,SILVER PLATED
MATERIALS:	

MJ-05B		MARUSHIN ELECTRIC MFG. CO., LTD.	
DIMENSIONS		USED 用途	APPO. 仕様
SIZE TO 2500mm	±0.10mm	FINISH 処理	CHGO. 検査
SIZE TO 1000mm	±0.13mm	SCALE 比例	DR. 製図
SIZE TO 100mm	±0.15mm	UNIT 単位 (22.2mm)	
UNIT	±0.20mm	TITLE 名前 SP DIN JACK FOR RING TYPE	
MATERIAL 材質		ENG. NO. 図号	SIZE 規格 A4
FILE NAME 図名		SHEET 張	REV. 改訂