
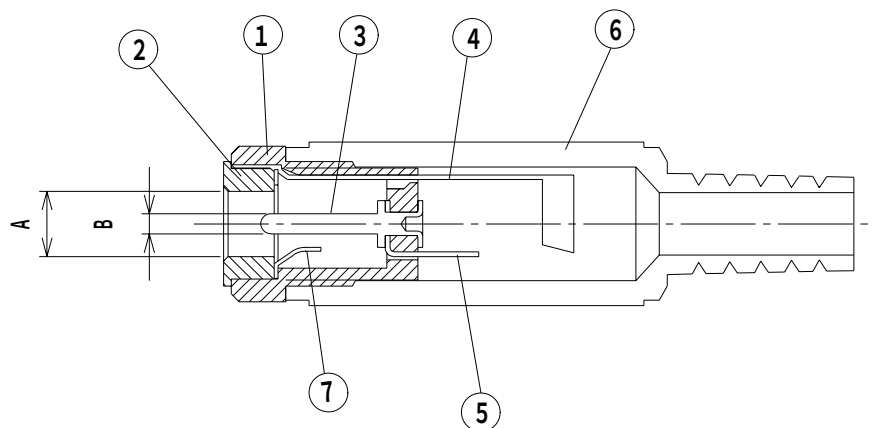

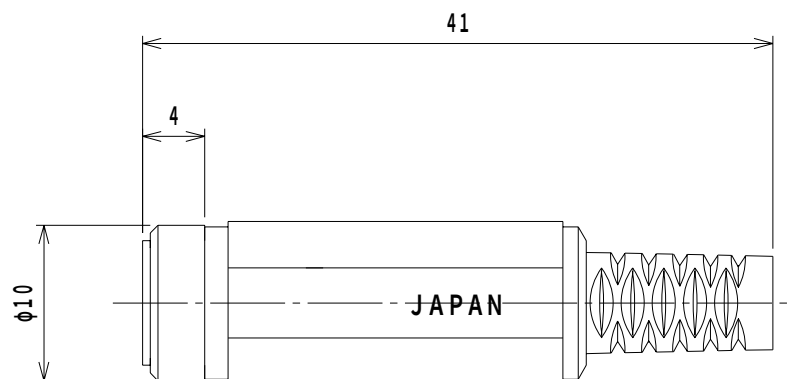


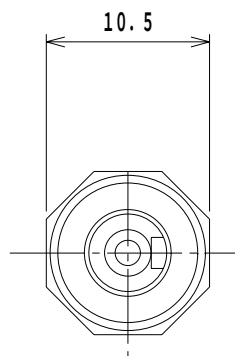

	A部	B部
MJ099N-R	φ3.6	φ1.3
MJ099N/3.8-R	φ4	φ1.3

仕様 SPECIFICATION	
1. 定格: =DC12V 0.5A RATING	
2. 絶縁抵抗: DC500V/100MΩ以上。 INSULATION RESISTANCE:100MΩMIN/500V DC.	
3. 耐電圧: AC500V 1分間。 BREAKDOWN VOLTAGE:500V AC FOR 1MINUTE.	

TOLERANCE		SCALE	DATE		DESING	DRAW	INSPE	APRO
±0.3		2/1	10/10/22		M. K	N. I		
MODEL 型式			QTY	PART NAME 品名	DCハ ワーインラインジ ャツク DC INLINE JACK		No. MJ099N-R No. MJ099N/3.8-R	
MATERIAL 材質					DRAW. NO 図番	MJ099N-R		
FINISH 処理			 MARUSHIN ELECTRIC MFG. CO., LTD.					

LET	PART NAME	MATERIAL	QTY	FINISH	NOTE
7	接触ハネ CONTACT	PBS-EH t=0.25	1	Ni	
6	キャップ CAP	PE	1		
5	ラグ B TERMINAL B	BSR t=0.3	1	Ni	
4	ラグ A TERMINAL A	BSR t=0.3	1	Ni	
3	ピン PIN	BSBM	1	Ni	
2	リング METAL	BSBM	1	Ni	
1	ボディ BODY	PA	1		