

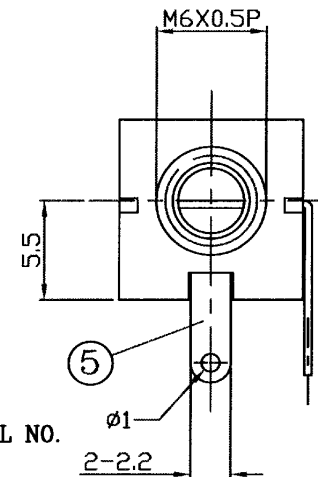
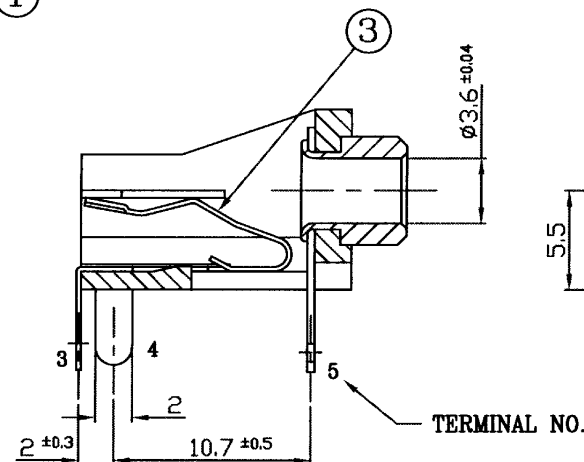
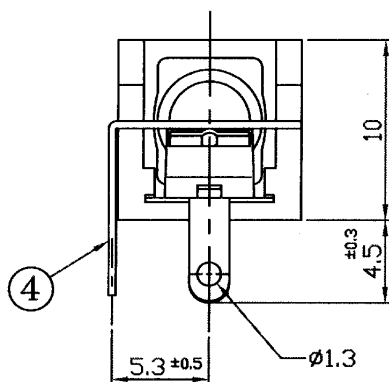


REVISION


LTR	DESCRIPTION	DATE	APPROVED
△	CHANGE FROM PC TO POM	10-11-99	K.F.IM
△	CHANGE FROM Y-CUT TO COPPER ALLOY	13-06-03	K.F.IM

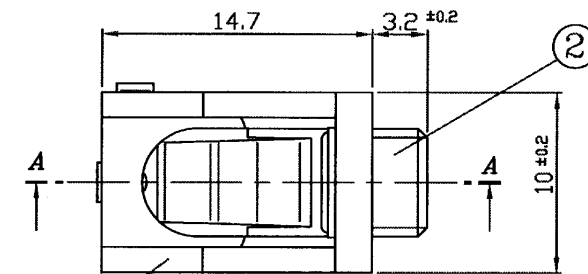

SECTION AA

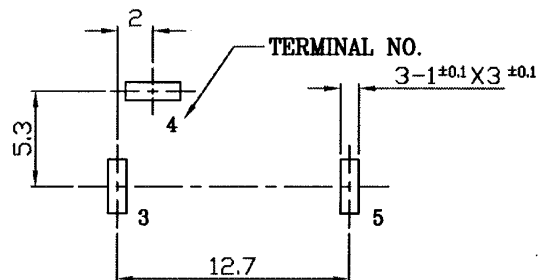

PC BOARD HOLE LAYOUT (GEN TOLS: ±0.2)
(UPPER VIEW FROM THE DIRECTION OF INSERTION TO PCB.)



CIRCUIT DIAGRAM

TOLERANCES

X ≤ 5 = ±0.10

X > 5 = ±0.30

ANGULAR = ± ---

DO NOT SCALE DWG.


FINISHED

LET	PART NAME	QTY	MATREIAL	REMARK
5	EARTH TERMINAL	1	BRASS 0.4t	Ag-PLATED
4	FIXED TERMINAL	1	BRASS 0.4t	Ag-PLATED
3	TIP SPRING	1	Y-CUT COPPER ALLOY 0.25t	Ag-PLATED
2	BUSHING	1	BRASS	Ni-PLATED
1	JACK CASING	1	PC-RESIN POM	BLACK

PART NAME
Ø3.5 MONO EARPHONE JACK

MATL
AS SHOWN IN TABLE

DATE
26-8-99



DWG NO.
MJ-148D

SCALE
5/2 mm

DRN
K.F.IM

MARUSHIN ELECTRIC MFG. CO., LTD