

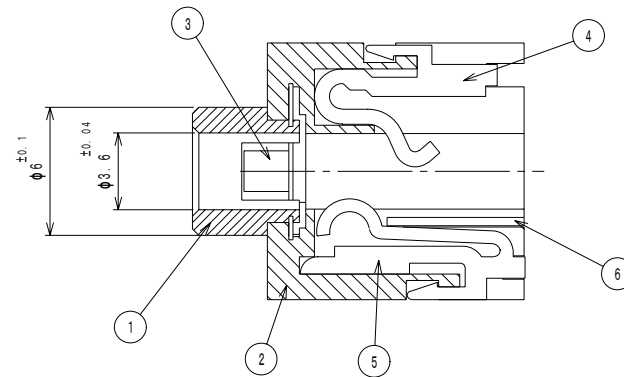
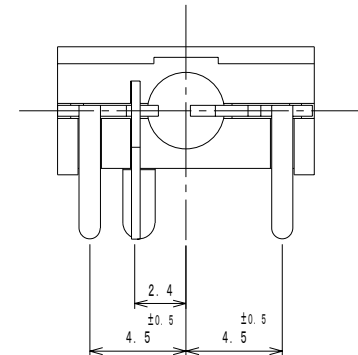


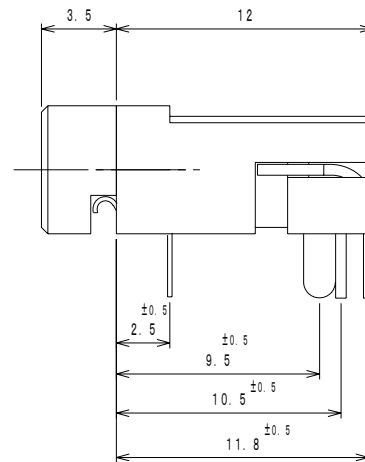


SPECIFICATION


1. WITHSTAND VOLTAGE : 500V AC FOR 1 MINUTE.
2. INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
3. CONTACT RESISTANCE : 50mΩMAX
4. LIFE : 3000 CYCLES

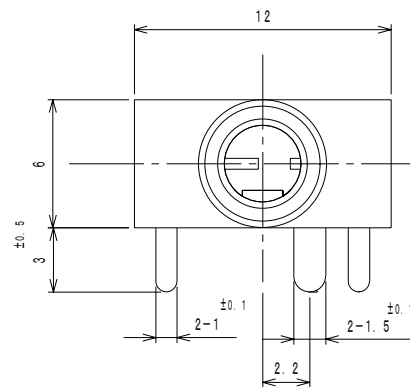

HOLE LAYOUT (BOTTOM VIEW)

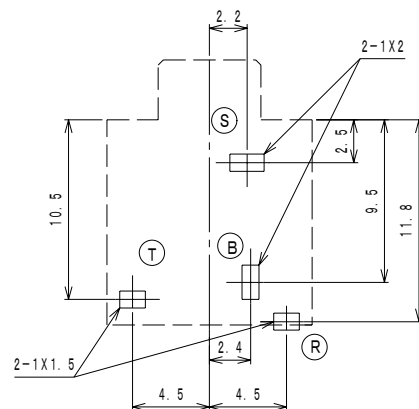

SCHEMATIC



6	BREAK-SHUNT SPRING (B)	BRASS	t=0.4	1	Ag	
5	RING SPRING (R)	PBS	t=0.5	1	Ag	
4	TIP SPRING (T)	PBS	t=0.5	1	Ag	
3	SLEEVE SPRING (S)	PBS	t=0.2	1	Ag	
2	BODY	PBT		1		
1	SLEEVE METAL	BRASS		1	Ni	
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	

TOLERANCE	SCALE	DATE	DESIG	DRAW	INSPE	APRO
±0.3	4/1	99/5/20		N. I		
MODEL 型式	QTY		PART NAME 品名	No. MJ-156L		
MATERIAL 材質				DRAW. NO 図番	MJ156L	
FINISH 処理	EST MARUSHIN ELECTRIC MFG. CO., LTD.					