





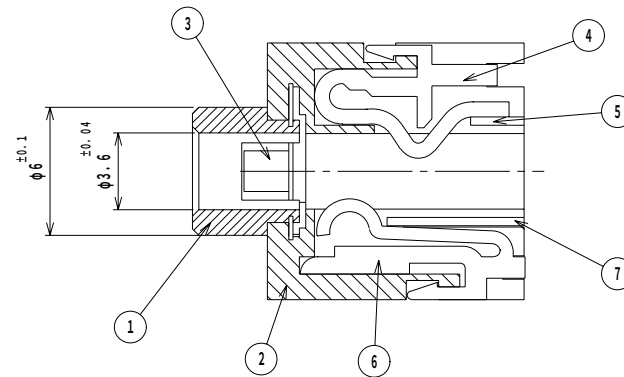


SPECIFICATION


1. WITHSTAND VOLTAGE : 500V AC FOR 1 MINUTE.
2. INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
3. CONTACT RESISTANCE : 50mΩ MAX

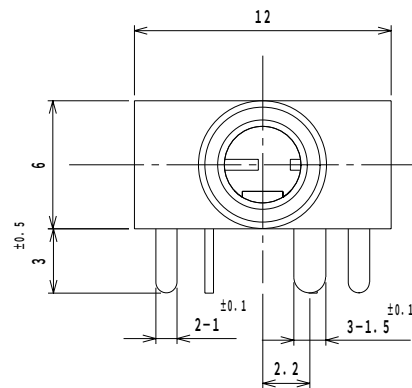

HOLE LAYOUT
(BOTTOM VIEW)

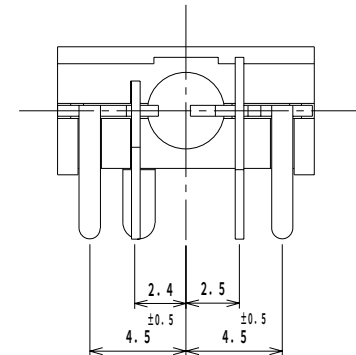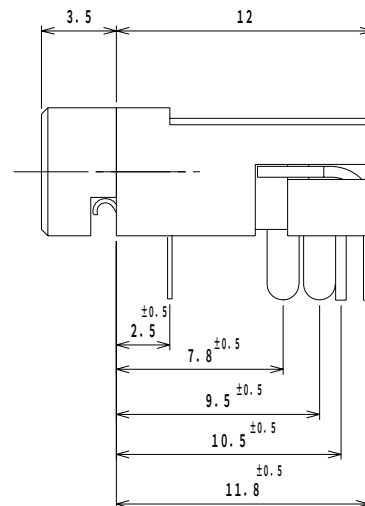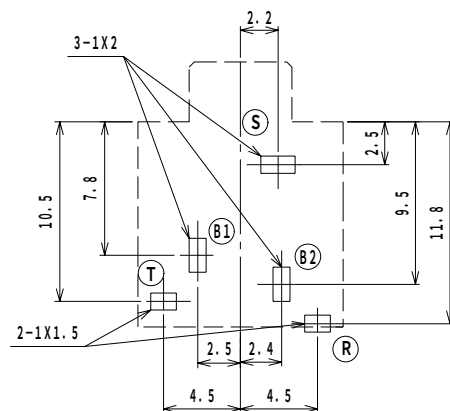

SCHEMATIC



						TOLERANCE	SCALE	DATE	DESIG	DRAW	INSPE	APRO
7	BREAK-SHUNT SPRING B (B2)	BRASS	t=0.4	1	Ag		±0.3	4/1	06/5/25		N. I	
6	RING SPRING (R)	PBS	t=0.5	1	Ag							
5	BREAK-SHUNT SPRING A (B1)	BRASS	t=0.4	1	Ag	MODEL		QTY	PART NAME	MJ156L-5		
4	TIP SPRING (T)	PBS	t=0.5	1	Ag	型式			品名			
3	SLEEVE SPRING (S)	PBS	t=0.2	1	Ag	MATERIAL				DRAW. NO	MJ156L-5	
2	BODY	PBT		1		材質				図番		
1	SLEEVE METAL	BRASS		1	Ni	FINISH				EST MARUSHIN ELECTRIC MFG. CO., LTD.		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	処理						