



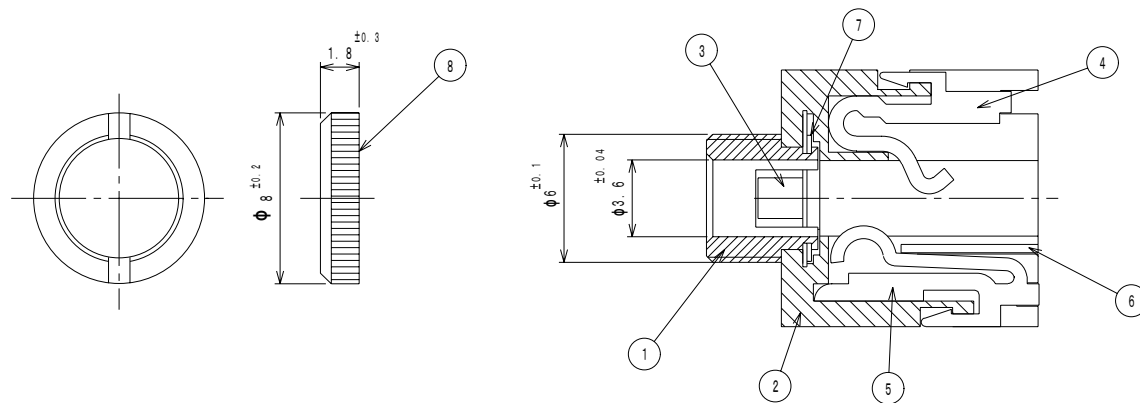


SPECIFICATION


1. WITHSTAND VOLTAGE : 500V AC FOR 1 MINUTE.
2. INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
3. CONTACT RESISTANCE : 50mΩMAX

HOLE LAYOUT

(BOTTOM VIEW)

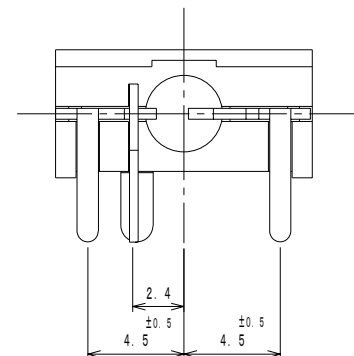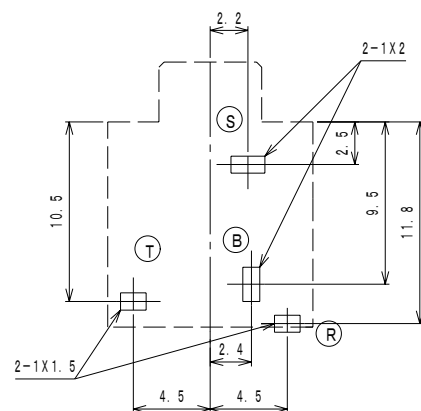

SCHEMATIC



8	NUT	BRASS	1	Ni		TOLERANCE	SCALE	DATE	DESIG	DRAW	INSPE	APRO
7	WASHER	PBS t=0. 2	1	Ni		±0. 3	4 / 1	99 / 5 / 20		N. I		
6	BREAK-SHUNT SPRING (B)	BRASS t=0. 4	1	Ag								
5	RING SPRING (R)	PBS t=0. 5	1	Ag		MODEL		QTY	PART NAME	No. MJ-158L		
4	TIP SPRING (T)	PBS t=0. 5	1	Ag		型式			品名			
3	SLEEVE SPRING (S)	PBS t=0. 2	1	Ag		MATERIAL				DRAW. NO	MJ158L	
2	BODY	PBT	1			材質				図番		
1	SLEEVE METAL	BRASS	1	Ni		FINISH				EST [®] MARUSHIN ELECTRIC MFG. CO., LTD		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	処理						

EST MARUSHIN ELECTRIC MFG. CO., LTD.