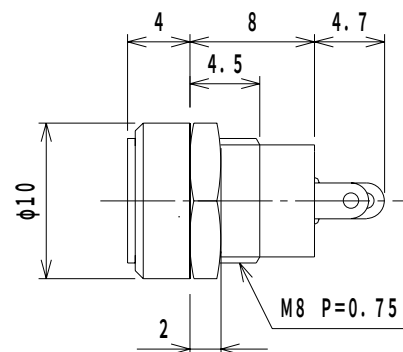
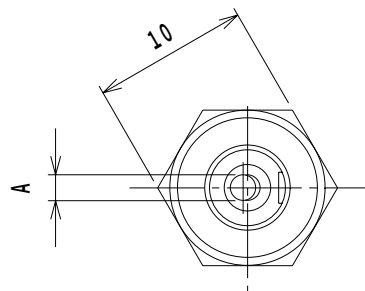



仕様 SPECIFICATION

1. 定格: MJ17S=DC6.3V 2A (電圧区分2 JSAJ2)
RATING MJ18S=DC10.5V 2A (電圧区分3 JSAJ3)
MJ99S=DC12V 0.5A
MJ99/3.8S=DC12V 0.5A


2. 絶縁抵抗: DC500V/100MΩ 以上。
INSULATION RESISTANCE:
DC500V/100MΩ MIN.

3. 耐電圧: AC500V 1分間。
WITHSTAND VOLTAGE:
AC500V 1MINUTE.

4. 接触抵抗: 30mΩ以下
CONTACT RESISTANCE:
30mΩMAX

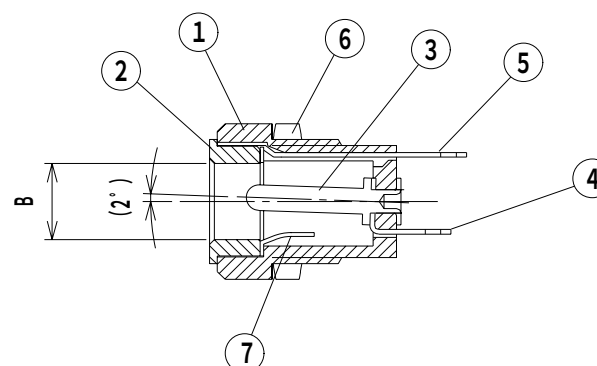

回路 CIRCUIT



品番 MODEL No.	A部	B部	適合プラグ MATE PLUG
MJ-17S	φ1.65	φ4.2	φ4.0 X φ1.7
MJ-18S	φ1.65	φ4.9	φ4.75 X φ1.7
MJ-99S	φ1.3	φ3.6	φ3.4 X φ1.35
MJ-99/3.8S	φ1.3	φ4.0	φ3.8 X φ1.35

						TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	CONTACT	PBS-EH t=0.25	1	Ni		±0.3	2/1	06/7/5	K.S	N.I		M.K
6	NUT 6角ナット	STEEL	1	Ni								
5	TERMINAL B ラグ B	BSR t=0.3	1	Ni		MODEL 型式		QTY	PART NAME 品名	DC JACK DCバ ワーシ ャック		
4	TERMINAL A ラグ A	BSR t=0.3	1	Ni						MJ-17S, 18S, 99S, 99/3.8S		
3	PIN ピ ン	BSBM	1	Ni		MATERIAL 材質				DRAW. NO 図番	MJ17S	
2	RING リング	BSBM	1	Ni								
1	BODY ボ デ ィ ー	PA	1			FINISH 処理				 MARUSHIN ELECTRIC MFG. CO., LTD.		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE							