

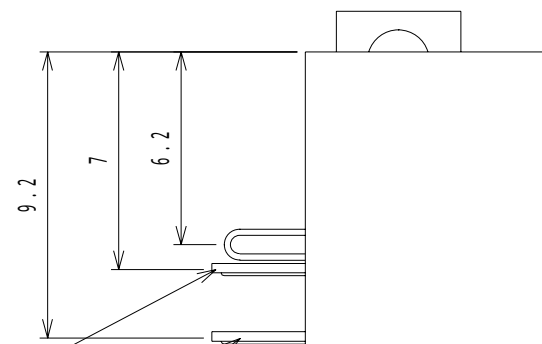
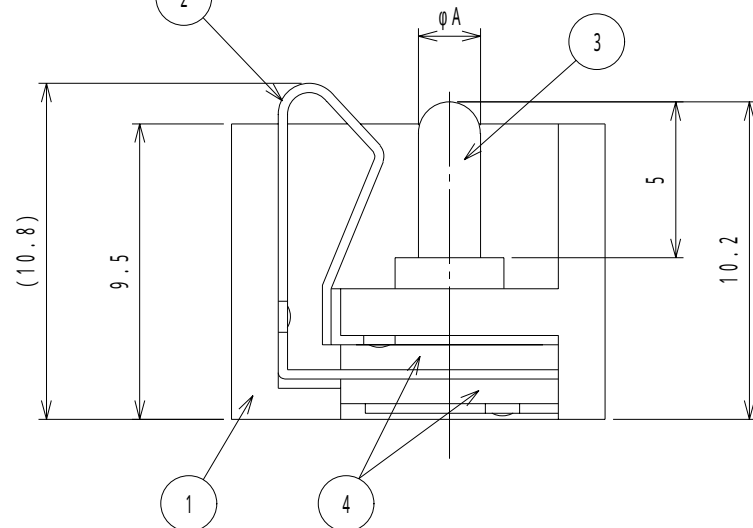


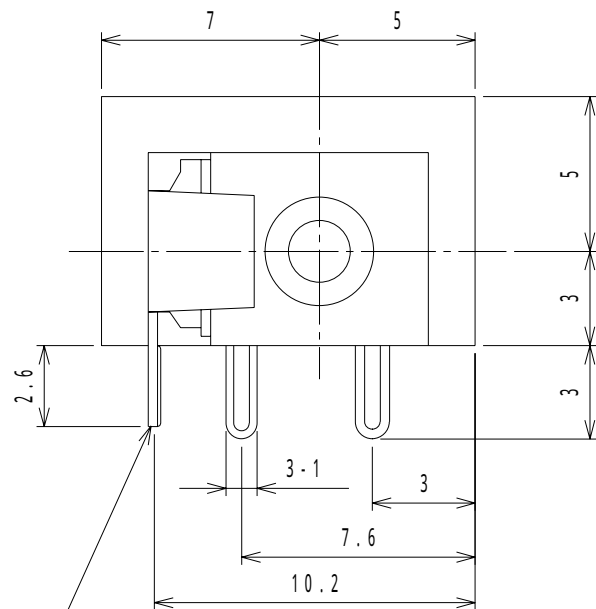

HOLE LAYOUT
(BOTTOM VIEW)

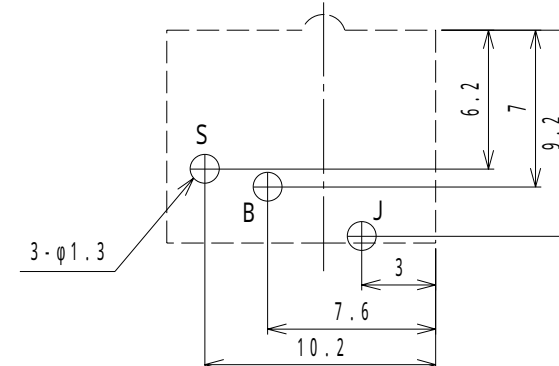

SPECIFICATIONS

1. RATING: 12V DC 1A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. DIELECTRIC STRENGTH: 500V AC FOR 1MINUTE.
4. INSULATION RESISTANCE: 100MΩ MIN. 500V DC.

	φ A
MJ - 196P	φ 1.9 ±0.05
MJ - 197P	φ 2.35 ^{+0.05} ₀

6	TERMINAL C (J)	BSR	1	Ag	
5	TERMINAL B (B)	BSR	1	Ag	
4	INSULATOR	PF	2		
3	CENTER PIN	BSBM	1	Ni	
2	TERMINAL A (S)	PBS	1	Ag	
1	BODY	PBT G15%	1		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE

TOLERANCE	SCALE	DATE	DESIG	DRAW	INSPE	APRO
± 0 . 3	4 / 1	4 / 1 / 17	M . K	N . I		
MODEL 型式		QTY	PART NAME 品名		No . MJ - 196 P / MJ - 197 P	
MATERIAL 材質 SEE TABLE			DRAW . NO 図番		MJ 196 P	
FINISH 处理		 MARUSHIN ELECTRIC MFG.CO., LTD				