
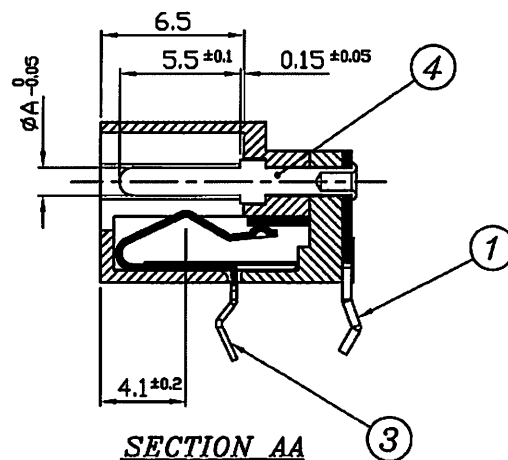
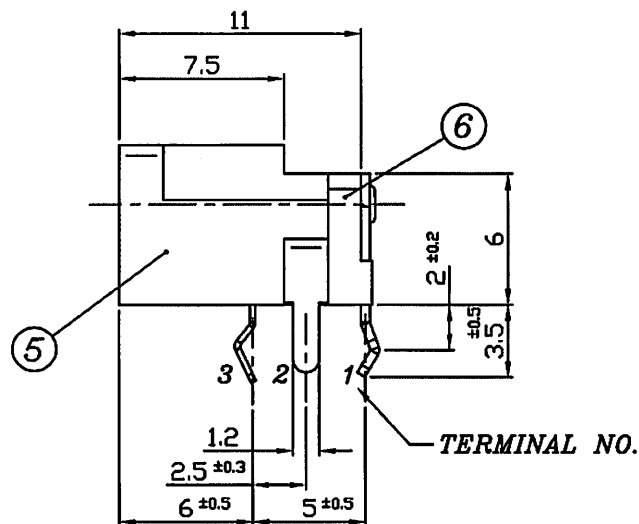
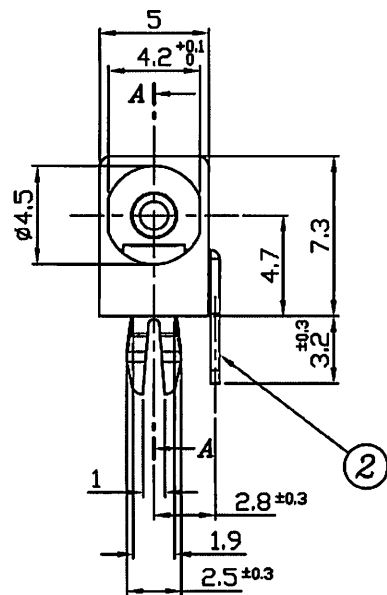


RATING: DC 6V 0.5A
 INSULATION RESISTANCE: DC 500V / 100M Ω MIN.
 WITHSTAND VOLTAGE: AC 250V 1MINUTE.
 INSERTION FORCE: 3.92~19.62N
 EXTRACTION FORCE: NOT LESS THAN 3.92N

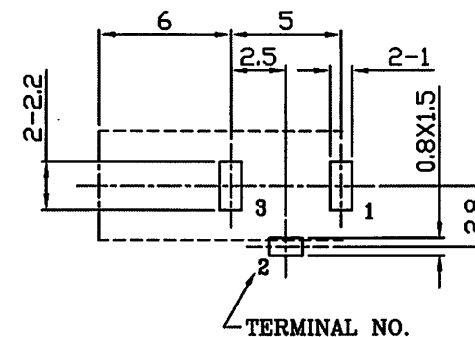

PC BOARD HOLE LAYOUT TOLS: ± 0.1
 (UPPER VIEW FROM THE DIRECTION OF INSERTION TO PCB.)

TABLE FOR PIN

MODEL NO	DIA ϕA
MJ-25N1	1.3

6	BACK COVER	1	PA66/GF RESIN	BLACK
5	JACK CASING	1	PBT/GF RESIN	BLACK
4	PIN	1	BRASS	NI-PLATED
3	TIP SPRING	1	COPPER ALLOY 0.25t	Ag-PLATED
2	SHUNT TERMINAL	1	BRASS 0.4t	Ag-PLATED
1	EARTH TERMINAL	1	BRASS 0.4t	Ag-PLATED
LET	PART NAME	QTY	MATERIAL	REMARK

TOLERANCES
 X $\leq 5 = \pm 0.10$
 X $> 5 = \pm 0.30$
 ANGULAR = $\pm$ ---
 DO NOT SCALE DWG.

FINISHED

PART NAME	DWG NO. VER.1
DC POWER JACK	MJ-25N1
MATL	SCALE
AS SHOWN IN TABLE	3/1 mm
DATE	DRN / APPD.

MARUSHIN ELECTRIC MFG.CO.,LTD.