
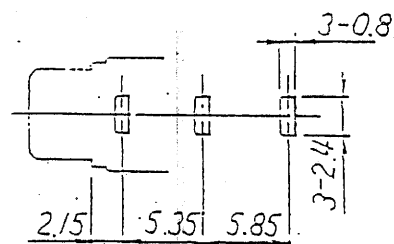

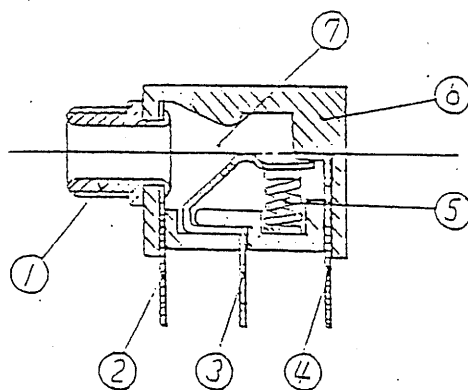


NOTE: Insulation Resistance: 100 Megaohm min. @ 250 VDC
 Dielectric Strength: 250 VAC for one minute
 Contact Resistance: 20 miliohm Max.
 LIFE CYCLE: 10,000 Cycles min.

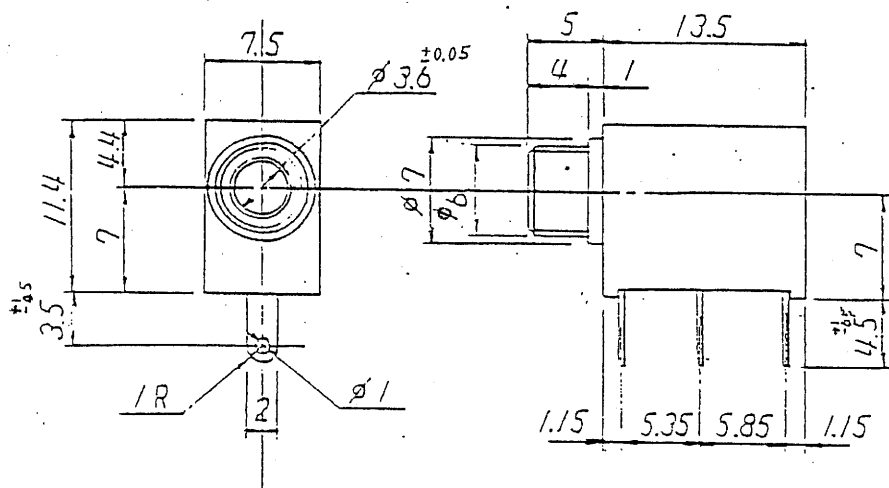

HOLE LAYOUT
(BOTTOM VIEW)

No	部品名	個数	画面番号	材質	処理	備考
1	SLEEVE	1	YJP-3500002	8s8M2 $\phi 7$	Ni-3	
2	TERMINAL A	1	-3520003	8sR2A-H 0.3t	Ag	
3	TERMINAL B	1	-3520005	8sR2A-H 0.3t	Ag	
4	TERMINAL C	1	-3520004	8sR2A-H 0.3t	Ag	
5	SPRING	1	-3500006	SUS-304 0.35t	無処理	
6	HOUSING	1	-3520002	GS2030M (PC 57.6)		
7	LID	1	-3520001	GS2030M		

MARUSHIN ELECTRIC MFG. CO., LTD.

MJ-352N

35φ一方端子ジャック

YES10001350201-1

J-352