


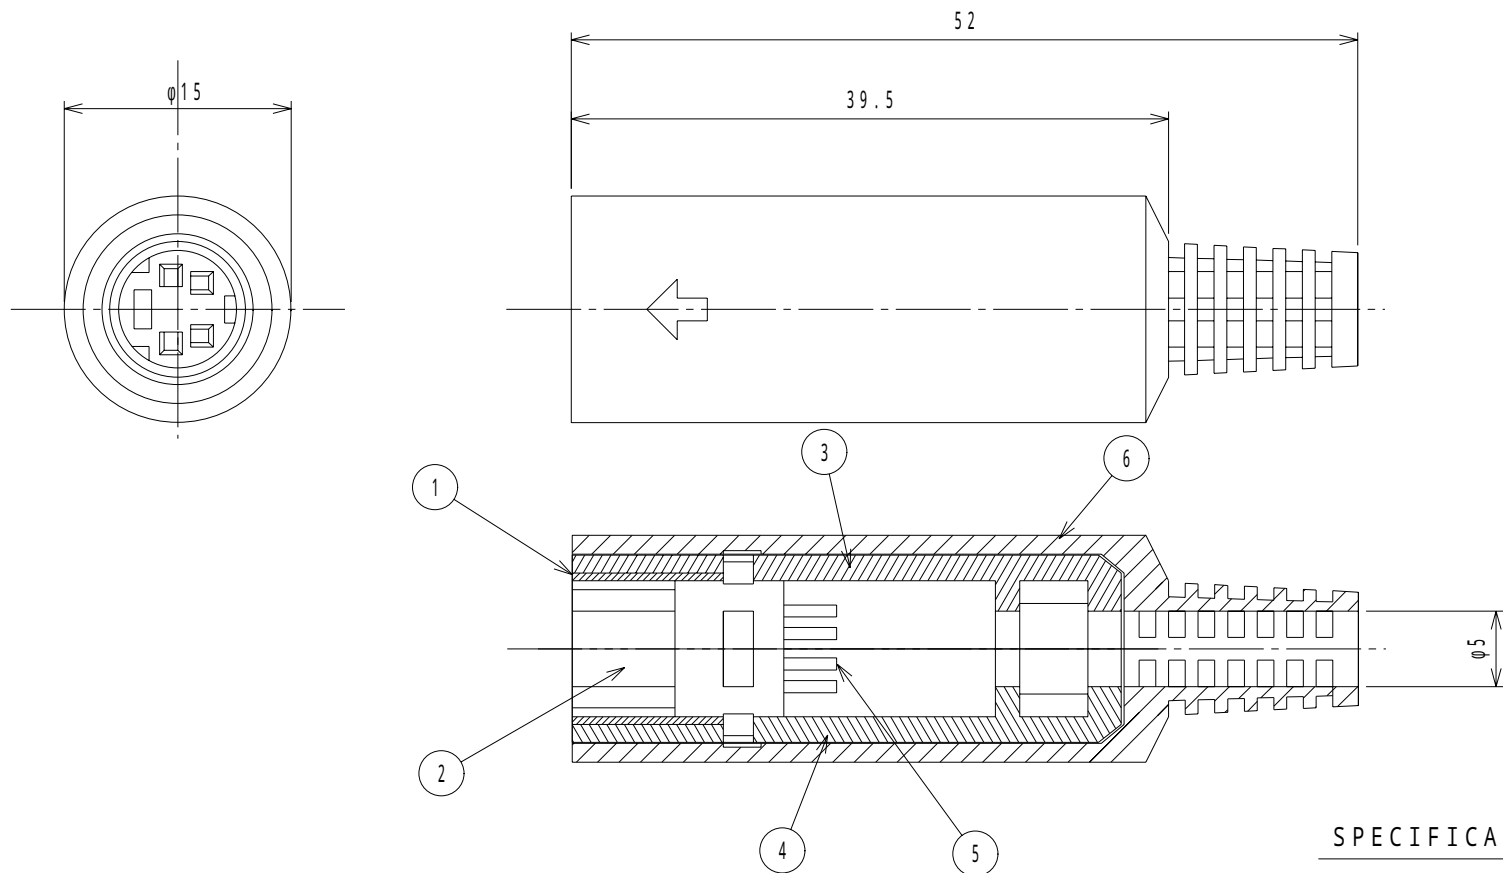

CONTACT CONFIGURATIONS

MJ372/3	MJ372/4	MJ372/5	MJ372/6	MJ372/7	MJ372/8

SPECIFICATION

RATING: 100V AC 1A MAX. (12V DC 2A MAX.)

INSULATION RESISTANCE: 50M Ω MIN AT 250V DC

DIELECTRIC STRENGTH: 250V AC/1 MINUTE.

6	CAP	P E	1		
5	CONTACT	PHOSPHOR BRONZE	3 ~ 8	Ag	
4	CABLE HOLDER B	ABS	1		
3	CABLE HOLDER A	ABS	1		
2	SHELL	BRASS	1	Ni	
1	HOUSING	PA6	1		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE

TOLERANCE	SCALE	DATE		DESING	DRAW	INSPE	APRO
± 0.3	2 / 1				N. I		
MODEL 型式			QTY	PART NAME 品名	MINI DIN IN-LINE JACK No. MJ-372 / 3 ~ 8		
MATERIAL 材質					DRAW. NO 図番	MJ372	
FINISH 処理			 MARUSHIN ELECTRIC MFG.CO., LTD.				