

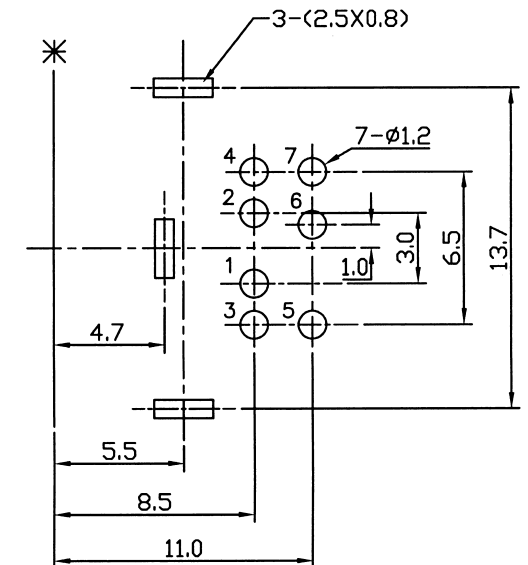
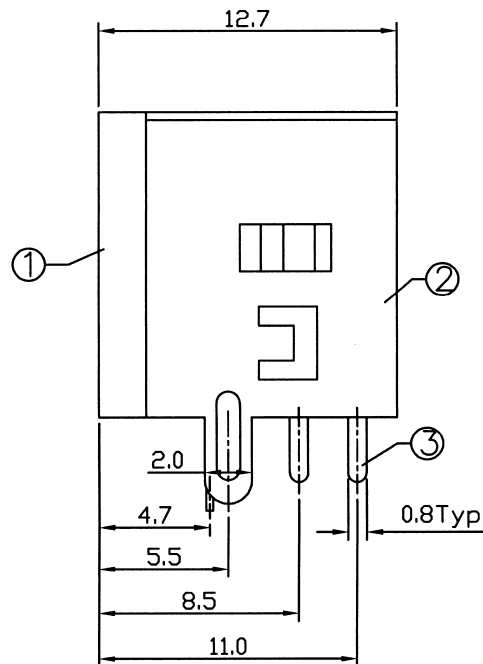


* REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED

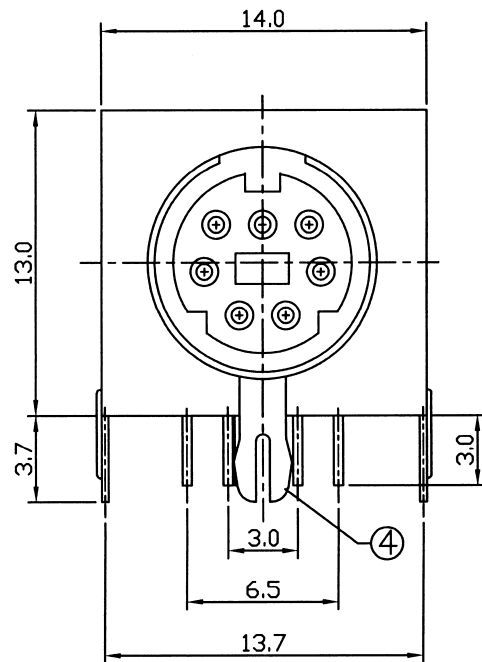

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-Top view)

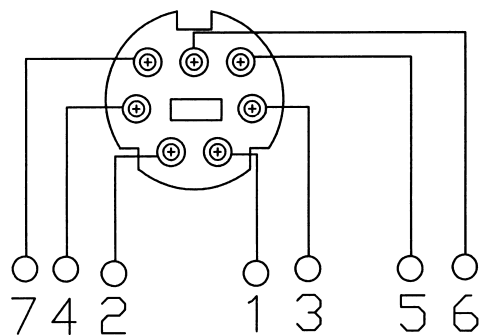

SPECIFICATION

RATING:100V AC 1A MAX, (12V DC 2A MAX.)
INSULATION RESISTANCE:50M Ω MIN AT 250V DC
DIELECTRIC STRENGTH:250V AC/1 MINUTE.

SCHEMATIC DIAGRAM

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

4	GROUND CONTACT	1	C2680	Cu/Sn	PLATED
3	CONTACT FOOT	7	C5191	Ag	PLATED
2	COAT	1	C2680	Cu/Sn	PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)	
LTR	PART NAME	QTY	MATERIAL	REMARK	
DWN		DATE		3RD ANGLE PROJECTION	NAME
CHKD		DATE			7PIN MINI DIN JACK
APVD		DATE		UNIT: mm	CAT. NO.
MARUSHIN ELECTRIC MFG. CO., LTD.					DWN.NO.
					MJ373/7B
					001