

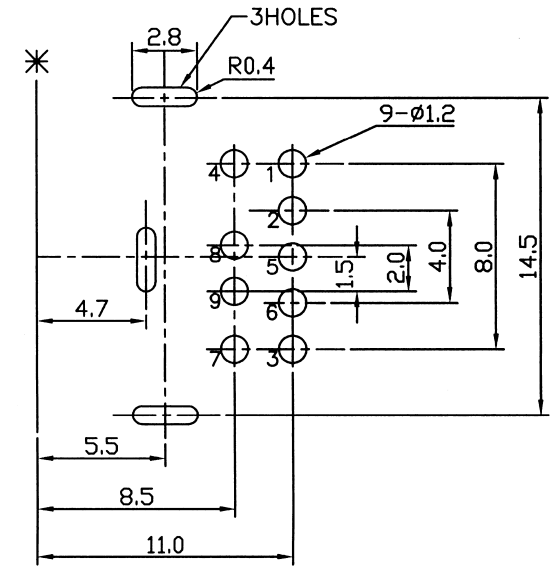
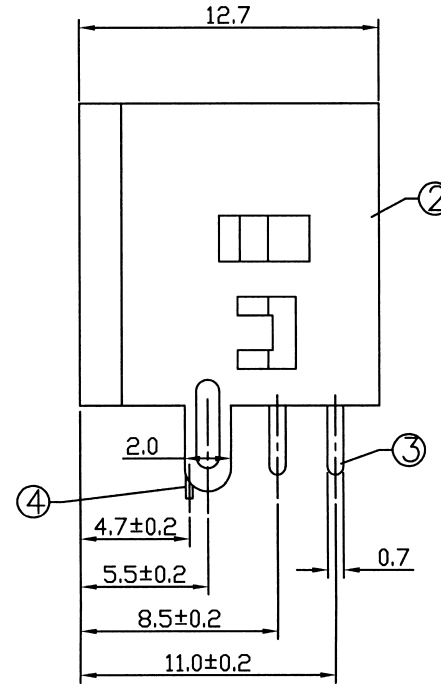


* REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED

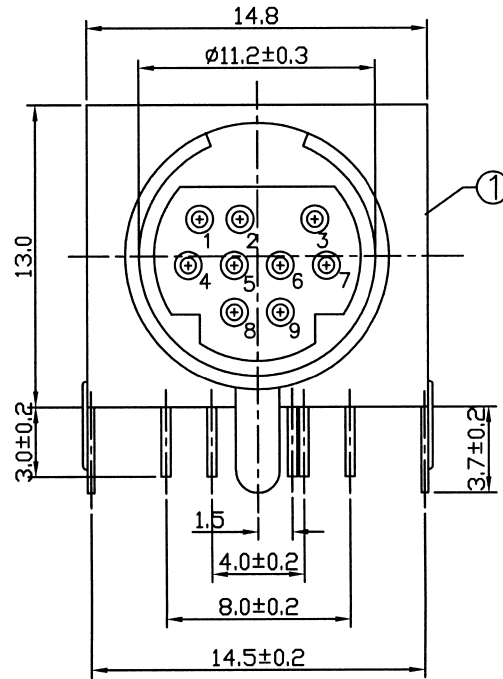

T:1.6 Dimensions of PC board holes
Tolerance :±0.05(Printed-top view)

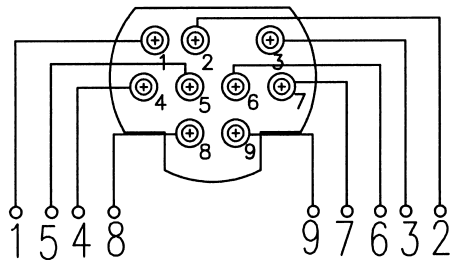

SCHEMATIC DIAGRAM

SPECIFICATION

RATING:100V AC 1A MAX, (12V DC 2A MAX.)
INSULATION RESISTANCE:50M MIN AT 250V DC
DIELECTRIC STRENGTH:250V AC/1 MINUTE.

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

4	CONTACT FOOT	1	C2680	t=0.4	Cu/Sn PLATED
3	CONTACT FOOT	9	C5191	t=0.4	Ag PLATED
2	COAT	1	SPCC	t=0.5	Cu/Sn PLATED
1	HOUSING	1	PBT 4815		UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL		REMARK
DWN		DATE		3RD ANGLE PROJECTION	NAME 9pin mini din jack
CHKD		DATE			CAT. NO.
APVD		DATE		UNIT: mm	
MARUSHIN ELECTRIC MFG. CO., LTD.					DWN.NO. MJ373/9B
					001