

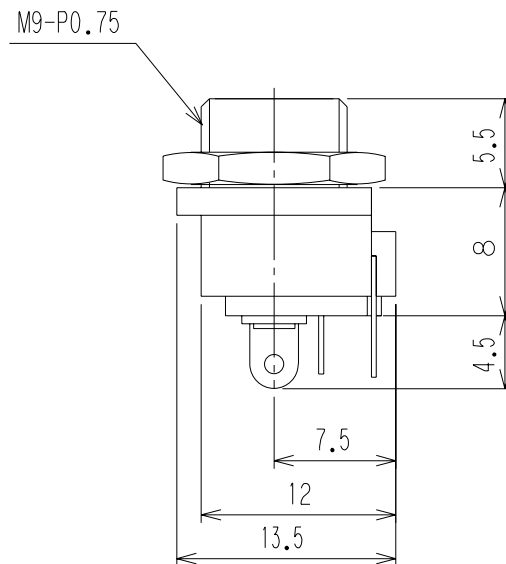
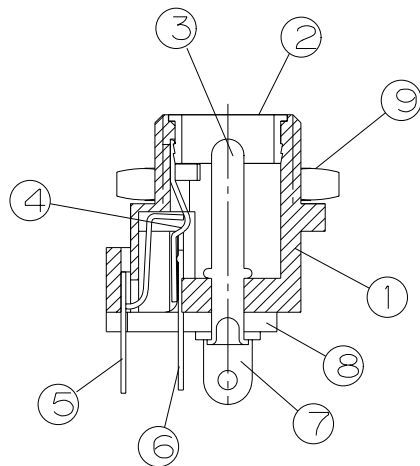
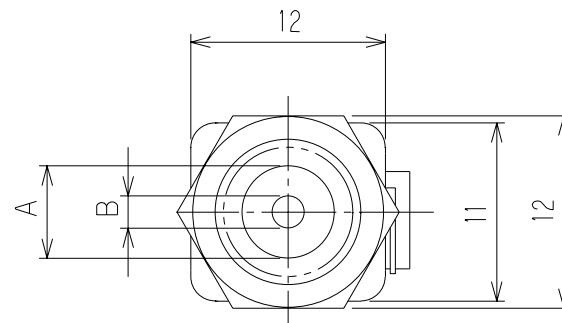


仕様
SPECIFICATION

1. 定 格 : MJ-40A=DC12V 0.5A
RATING MJ-41A=DC12V 1A
MJ-42A=DC6.3V 2A
MJ-43A=DC10.5V 2A
MJ-44A=DC12V 0.5A
MJ-45A=DC12V 0.5A
2. 接触抵抗 : 30mΩ以下
CONTACT RESISTANCE:
30mΩ MAX.
3. 絶縁抵抗 : DC500V/100MΩ以上.
INSULATION RESISTANCE:
DC500V/100MΩ MIN.
4. 耐 電 圧 AC500V 1分間.
WITHSTAND VOLTAGE:
AC500V 1MINUTE.

MODEL	A	B
MJ-40A	$\phi 5.7$	$\phi 2$
MJ-41A	$\phi 5.7$	$\phi 2.35$
MJ-42A	$\phi 4.2$	$\phi 1.65$
MJ-43A	$\phi 5$	$\phi 1.65$
MJ-44A	$\phi 3.6$	$\phi 1.3$
MJ-45A	$\phi 4.2$	$\phi 1.3$

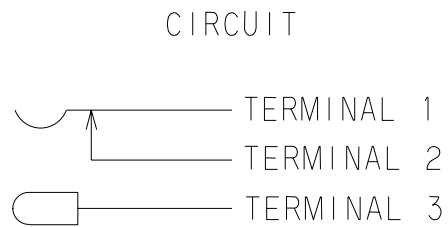

9	ナット	HEX NUT	STEEL	1	Ni							
8	絶縁ヘリーク	INSULATOR	PBT G30%	1		TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	センター端子	TERMINAL 3	BSR t=0.5	1	Ag	±0.3	2/1	23/1/17	K.S	M.K	N.S	N.I
6	固定接触端子	TERMINAL 2	BSR t=0.3	1	Ag							
5	スリーブ端子	TERMINAL 1	PBS t=0.3	1	Ag	MODEL 型式		QTY	PART NAME 品名	MJ-40A/41A/42A/43A/44A/45A		
4	スリーブハネ	CONTACT	PBS t=0.3	1	Ag							
3	センターピン	PIN	BSBM	1	Ni	MATERIAL 材質				DRAW.NO 図番	MJ40X	
2	口金	SLEEVE	BSBM	1	Ni							
1	本体	BODY	PA G15%	1		FINISH 処理	 MARUSHIN ELECTRIC MFG.CO.,LTD.					
LET	PART NAME		MATERIAL	QTY	FINISH							