


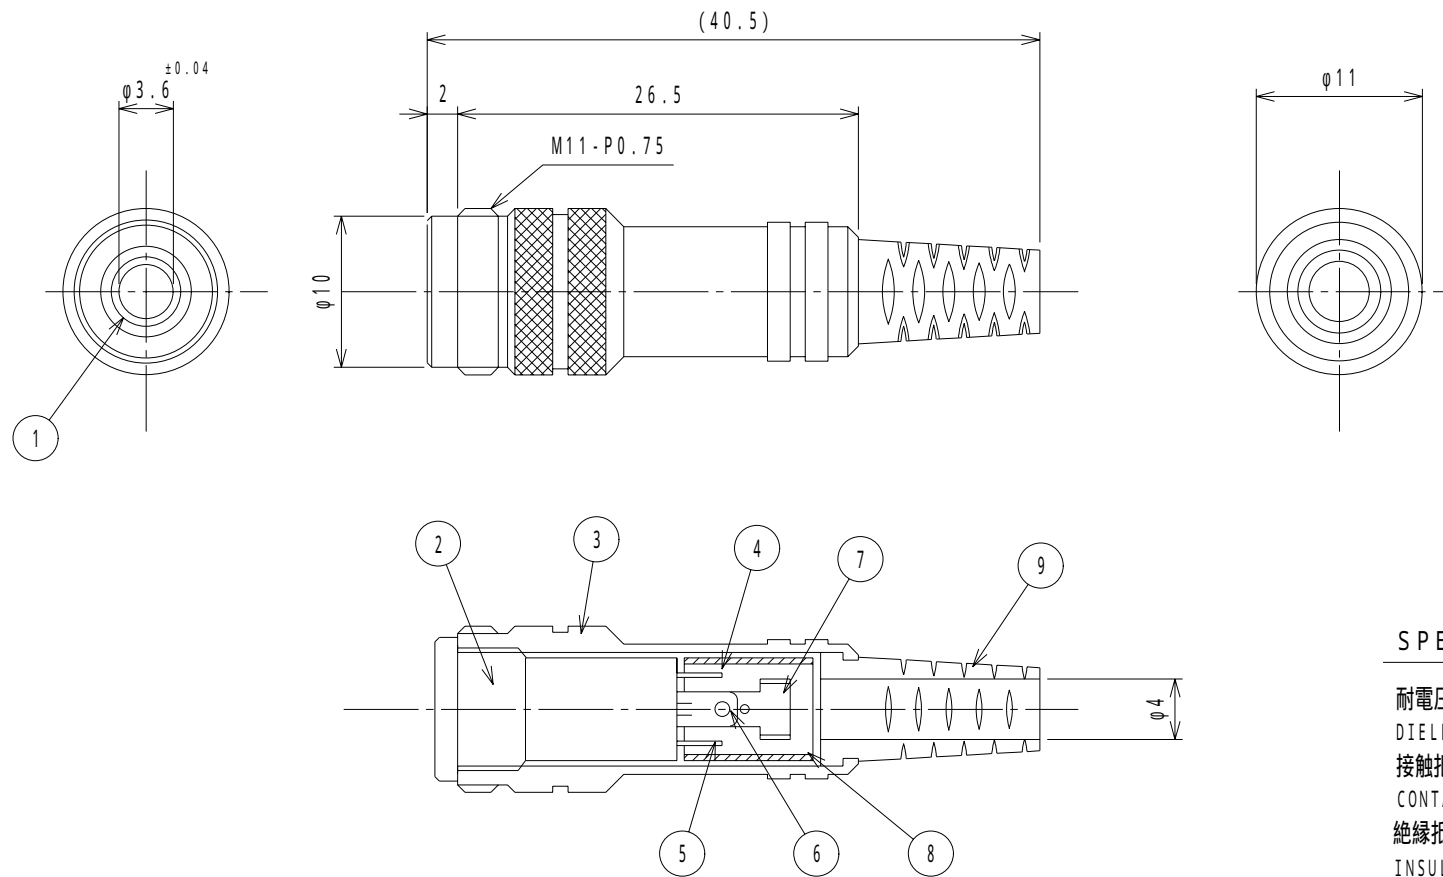

仕様
SPECIFICATION

耐電圧 : AC 500V 1分間
DIELECTRIC STRENGTH: 500V AC FOR ONE MINUTE.
接触抵抗 : 50mΩ以下
CONTACT RESISTANCE: 50mΩ MAX
絶縁抵抗 : DC 100Vにて100MΩ以上
INSULATION RESISTANCE: 100MΩ MIN. AT 500V DC.

9	CABLE PROTECTOR	PVC	1									
8	INSULATOR	PVC	1			TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	SLEEVE TERMINAL	STEEL t=0.3	1	Ni		±0.3	2/1	06/5/1	K.S	N.I	K.S	M.K
6	RING B TERMINAL	PBS t=0.25	1	Ni								
5	TIP TERMINAL	PBS t=0.25	1	Ni		MODEL	QTY	PART NAME	4-CON.MINIATURE JACK No.MLR-034J			
4	RING A TERMINAL	PBS t=0.25	1	Au		型式		品名				
3	CAP	BSBM	1	Ni		MATERIAL		DRAW.NO	MLR034J			
2	BODY	PA	1			材質		図番				
1	SLEEVE METAL	BSBM	1	Ni		FINISH			EST MARUSHIN ELECTRIC MFG.CO.,LTD.			
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	処理						