
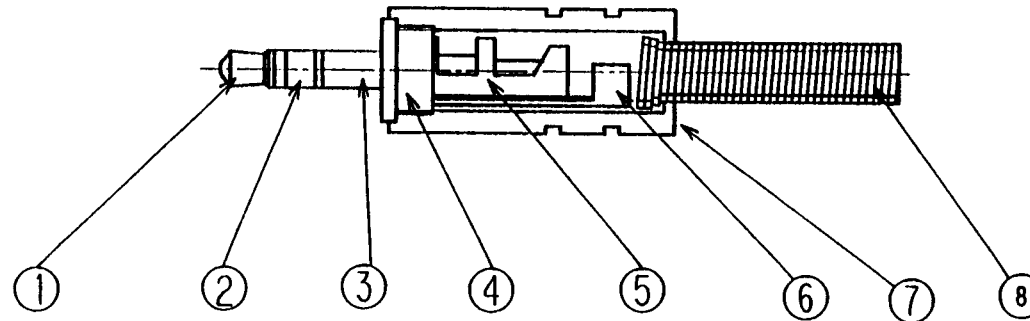


NOTE:

Rating: 34 VAC/DC 0.5A

Insulation Resistance: 100 Megaohm  
min. @500 VDC.

Dielectric Strength: 500 VAC for one  
minute.

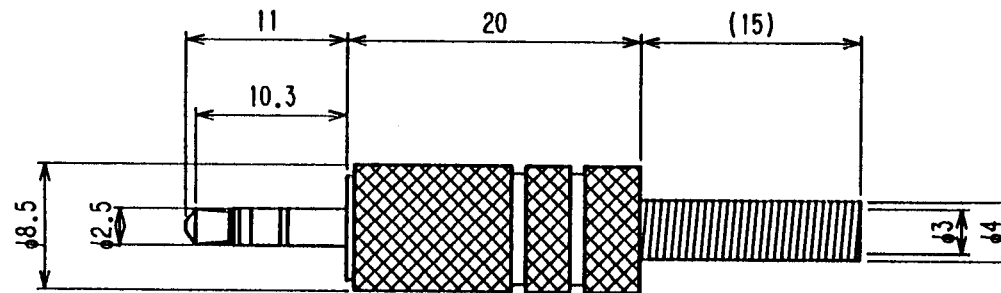

|     |              |          |     |        |      |           |       |      |           |                                    |       |      |
|-----|--------------|----------|-----|--------|------|-----------|-------|------|-----------|------------------------------------|-------|------|
| 8   | Spring       | SWPA     | 1   | NI     |      | TOLERANCE | SCALE | DATE | DESING    | DRAW                               | INSPE | APRO |
| 7   | Cap          | Brass    | 1   | NI     |      | ±0.5      | 2/1   |      |           | N.1                                |       |      |
| 6   | Terminal     | Brass    | 1   | NI     |      |           |       |      |           |                                    |       |      |
| 5   | Insulator    | POM      | 1   |        |      |           |       |      |           |                                    |       |      |
| 4   | Screw Thread | Brass    | 1   | NI     |      | MODEL     |       | QTY  | PART NAME | MP026L                             |       |      |
| 3   | Sleeve B     | Brass    | 1   | NI     |      | 型式        |       |      | 品名        |                                    |       |      |
| 2   | Sleeve A     | Brass    | 1   |        |      | MATERIAL  |       |      |           | DRAW.NO                            |       |      |
| 1   | Tip          | Brass    | 1   | NI     |      | 材質        |       |      |           | 図番                                 |       |      |
| LET | PART NAME    | MATERIAL | QTY | FINISH | NOTE | FINISH    |       |      |           | EST MARUSHIN ELECTRIC MFG.CO.,LTD. |       |      |
|     |              |          |     |        |      | 処理        |       |      |           |                                    |       |      |