


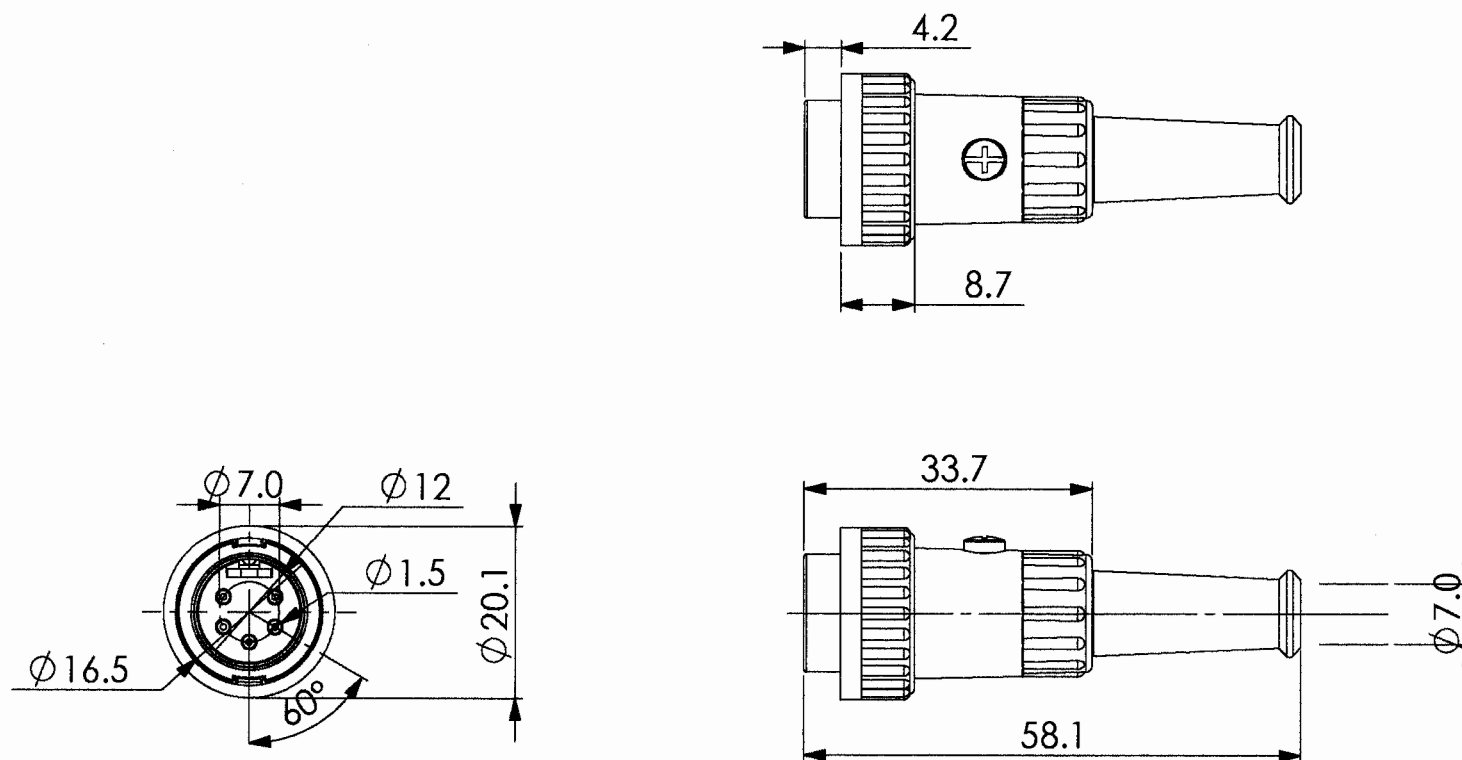

7	Strain Boot	PVC		1
6	Terminals	Brass	Silver Ptd.	5
5	Housing	ABS		1
4	Setscrew	Steel	Nickel Ptd.	1
3	"T" Holder	Steel	Nickel Ptd.	1
2	Screw Cap	Zn Alloy	Nickel Ptd.	1
1	Shield Cover	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

Specifications

rating :

100V AC 4A MAX

contact resistance :

pins-30mΩ MAX; shell-50mΩ MAX

Insulation resistance :

MIN 100 MEGΩ @500V DC

voltage withstand :

250V AC R.M.S. for 1 minute

品名: ITEM :	5P240 DIN CABLE PLUG BAYONET LOCKING			一般公差 X +/-0.25 XX +/-0.10	SHEET: 1 1	單位: unit:	mm	日期: date:	'07/01/23	繪圖: drwn by:	DanielShyr
	料號: PART NO		圖號: DRW NO.			比例: scale:	3 : 2	版本: version:	V. 1.0	核准: aprvid by:	SkyShyr