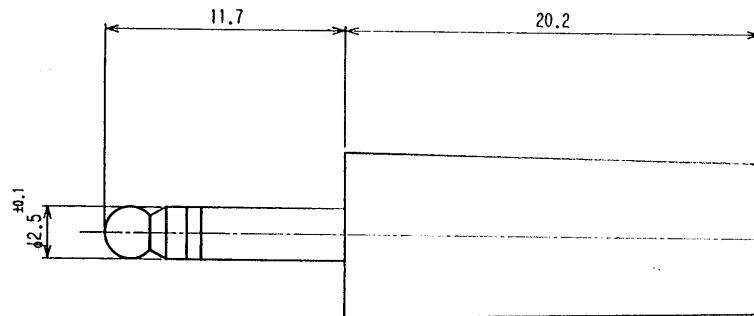


仕 様

1. 絶縁抵抗: DC100Vにて100MΩ以上

2. 耐電圧: AC500V1分間


NOTE

DIELECTRIC STRENGTH

500 VAC for one minute.

INSULATION RESISTANCE

100 Megaohm min. @100 VDC

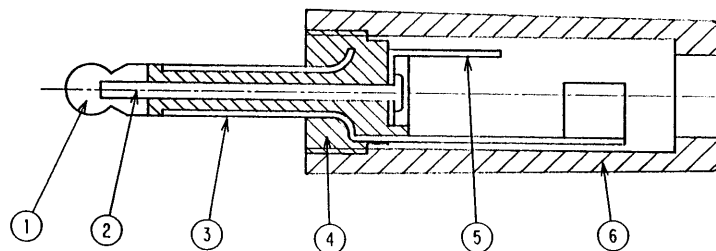

				TOLERANCE	SCALE	DATE	DESIG	DRAW	INSPE	APRO
				±0.5	4/1		H.K	N.I	S.T	M.K
6	HANDLE	ABS	1							
5	CENTER TERMINAL	BRASS	1	NI						
4	INSULATOR	ABS	1							
3	SLEEVE	BRASS	1	NI						
2	NAIL	STEEL	1	NI						
1	TIP	BRASS	1	NI						
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	MODEL 型式	QTY 数量	PART NAME 品名	MP101MR	
						MATERIAL 材質			DRAW.NO 図番	
						FINISH 処理		EST MARUSHIN ELECTRIC MFG.CO., LTD.		