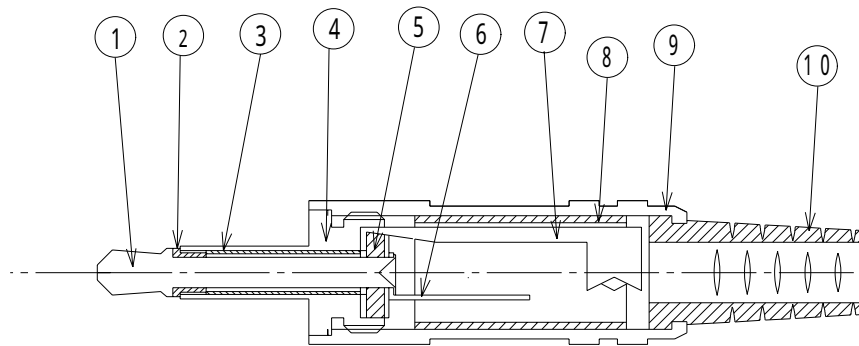
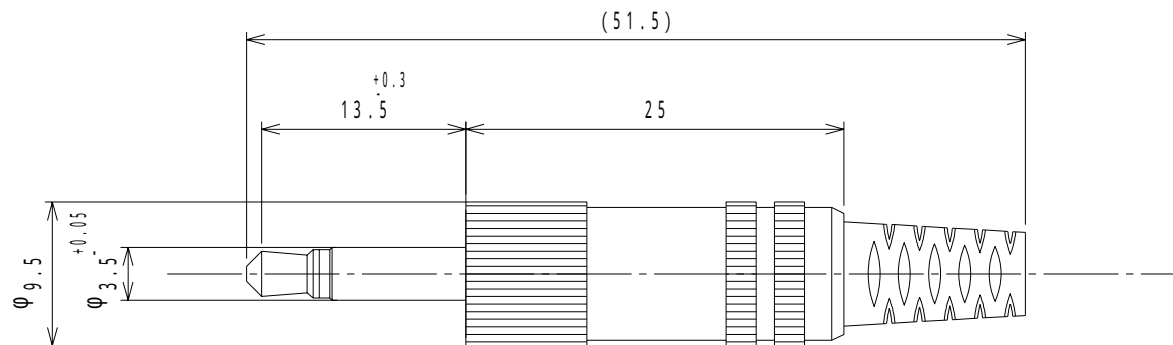


SPECIFICATION

DIELECTRIC STRENGTH:500V AC FOR ONE MINUTE.

CONTACT RESISTANCE:50mΩ MAX

INSULATION RESISTANCE:100MΩ MIN.AT 500V DC.

10	CABLE PROTECTOR	1	PVC	
9	CAP	1	BRASS	Ni
8	INSULATOR D	1	PVC	
7	TERMINAL B	1	STEEL	Ni
6	TERMINAL A	1	STEEL	Ni
5	INSURATOR C	1	PF	
4	SLEEVE	1	BRASS	Ni
3	INSURATOR B	1	PVC	
2	INSULATOR A	1	EBONITE	
1	CONTACT	1	BRASS	Ni
No	PART NAME	QTY	MATERIAL	FINISH

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
+ 0.5 -	2 / 1	01/7/10		N . I		
MODEL 型式		QTY	PART NAME 品名		No . MP - 106LC	
MATERIAL 材質			DRAW . NO 図番		MP106LC	
FINISH 処理		EST MARUSHIN ELECTRIC MFG.CO.,LTD.				