
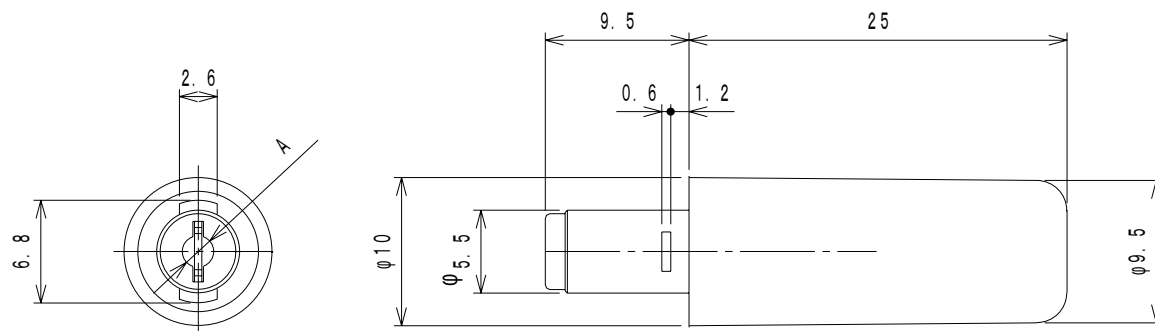


SPECIFICATION

1. RATING : DC12V 1A
2. DIELECTRIC STRENGTH
AC500V for 1minute
3. INSULATION RESISTANCE:
4. CONTACT RESISTANCE:
30mΩ min

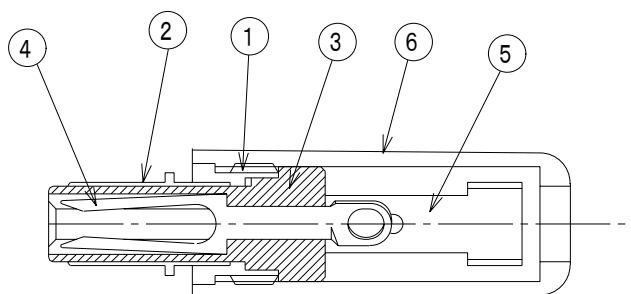

A	
MP121AR	$\phi 2.1^{+0.1}_{-0}$
MP122AR	$\phi 2.5^{\pm 0.05}$

						TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
6	CAP	ABS	1			± 0. 3	2 / 1	14 / 7 / 10	M. K	N. I	K. S	M. K
5	TERMINAL	STEEL t=0. 4	1	N i		MODEL 型式		QTY	PART NAME 品名	MP 12 1 AR / MP 12 2 AR		
4	CONTACT	PBS t=0. 6	1	N i								
3	INSULATION	POM	1			MATERIAL 材質				DRAW. NO 図番	MP 12 1 AR - E	
2	SLEEVE	BRASS	1	N i								
1	METAL	BRASS	1	N i		FINISH 処理			EST [®] MARUSHIN ELECTRIC MFG. CO. , LTD.			
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE							



MARUSHIN ELECTRIC MFG. CO., LTD.