



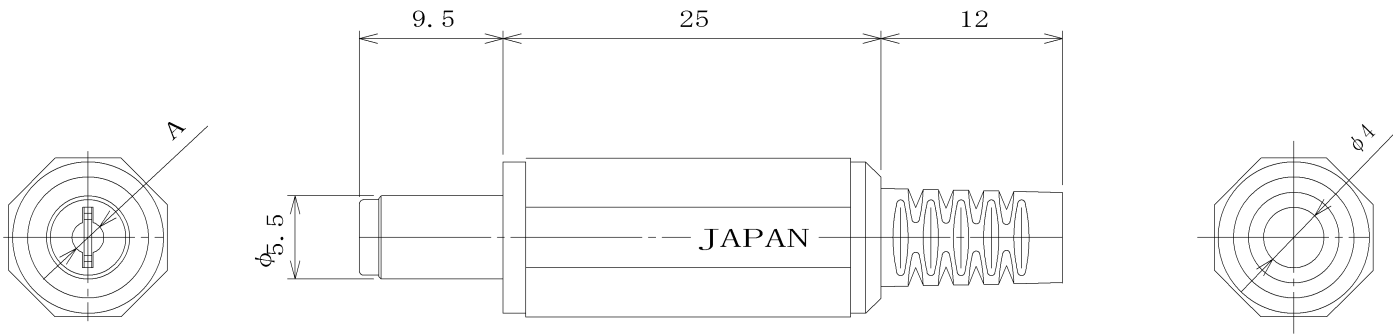

| A        |               |
|----------|---------------|
| MP-121FH | ( $\phi$ 2.1) |
| MP-122FH | ( $\phi$ 2.5) |

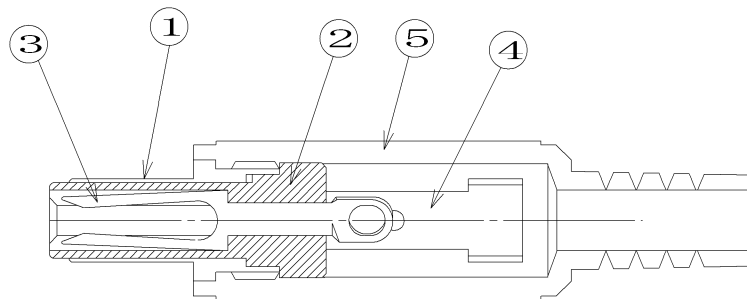

#### SPECIFICATION

1. RATING: DC12V 6A DC24V 3A
2. DIELECTRIC STRENGTH:  
500V AC for 1 minute
3. INSULATION RESISTANCE:  
100M $\Omega$  min. at 500V DC
4. CONTACT RESISTANCE:  
30M $\Omega$  MAX.

| TOLERANCE | SCALE | DATE      | DESING | DRAW | INSPE | APRO |
|-----------|-------|-----------|--------|------|-------|------|
| $\pm 0.3$ | 2/1   | 2025/6/10 | K. S   | N, S | S, I  | S, I |

|                |                                                   |                 |                              |
|----------------|---------------------------------------------------|-----------------|------------------------------|
| MODEL<br>型式    | QTY                                               | PART NAME<br>品名 | DC PLUG<br>MP-121FH/MP-122FH |
| MATERIAL<br>材質 | DRAW. NO<br>図番 MP-121FH                           |                 |                              |
| FINISH<br>処理   | EST <sup>®</sup> MARUSHIN ELECTRIC MFG. CO., LTD. |                 |                              |

|     |              |          |     |        |      |
|-----|--------------|----------|-----|--------|------|
| 5   | CAP          | PE       | 1   |        |      |
| 4   | TERMINAL     | STEEL    | 1   | Ni     |      |
| 3   | CONTACT      | PBS      | 1   | Ni     |      |
| 2   | INSULATOR    | PA       | 1   |        |      |
| 1   | SLEEVE METAL | BSBM     | 1   | Ni     |      |
| LET | PART NAME    | MATERIAL | QTY | FINISH | NOTE |