

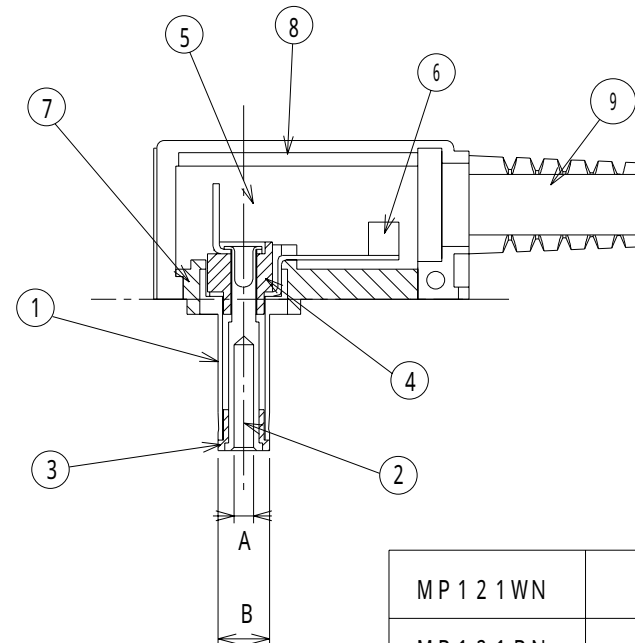


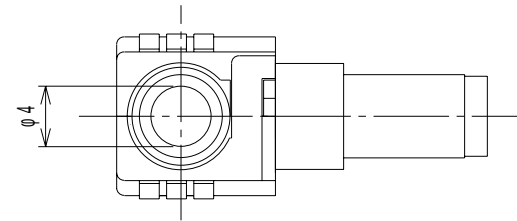

RATING: 12 VDC at 0.5A
 DIELECTRIC STRENGTH: 500 VAC for 1 minute.
 INSULATION RESISTANCE: 100MΩ mini. at 500 VDC

	A	B
MP121WN	φ1.4	φ3.4
MP121PN	φ1.1	φ3

						TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
8	CAP	PVC	1			±0.3	2 / 1	13/8/30	M.K	N.I		
7	INSULATOR, C	PA	1			MODEL 型式			QTY	PART NAME		MP121WN / 121PN
6	TERMINAL, B	BSR	1	NI						品名		
5	TERMINAL, A	BSR	1	NI		MATERIAL 材質			DRAW. NO			
4	INSULATOR, B	PC	1						図番			
3	INSULATOR, A	EBONITE	1			FINISH 処理			EST MARUSHIN ELECTRIC MFG.CO., LTD.			
2	CONTACT	BSBM	1	NI								
1	SLEEVE	BSBM	1	NI								

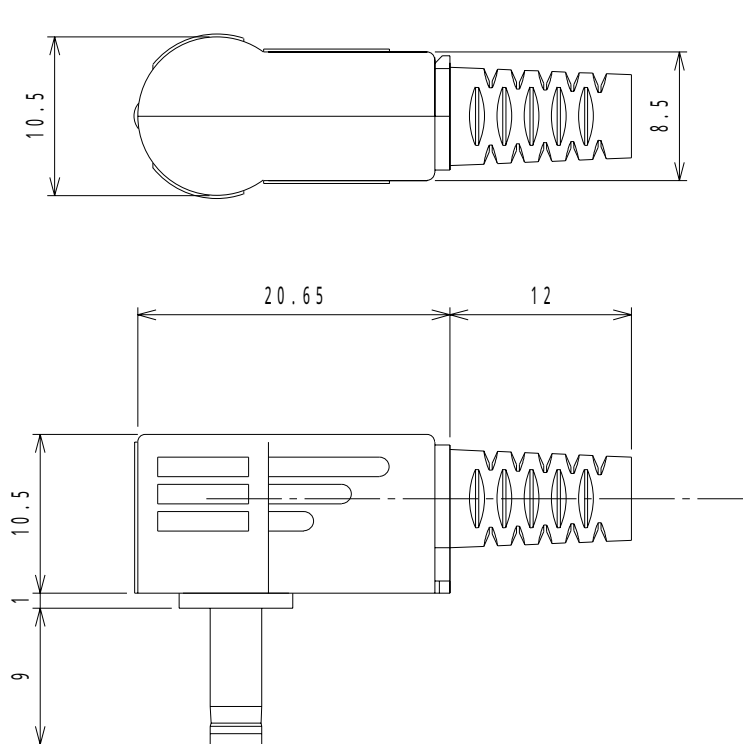