
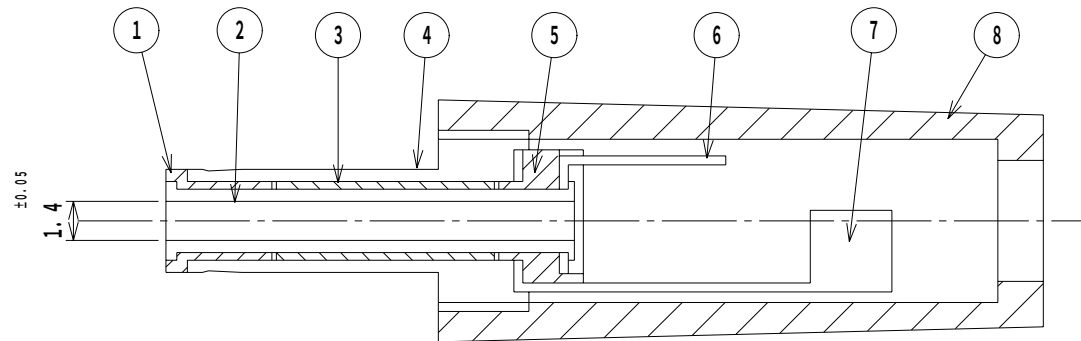
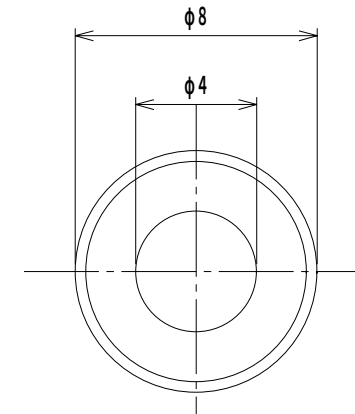


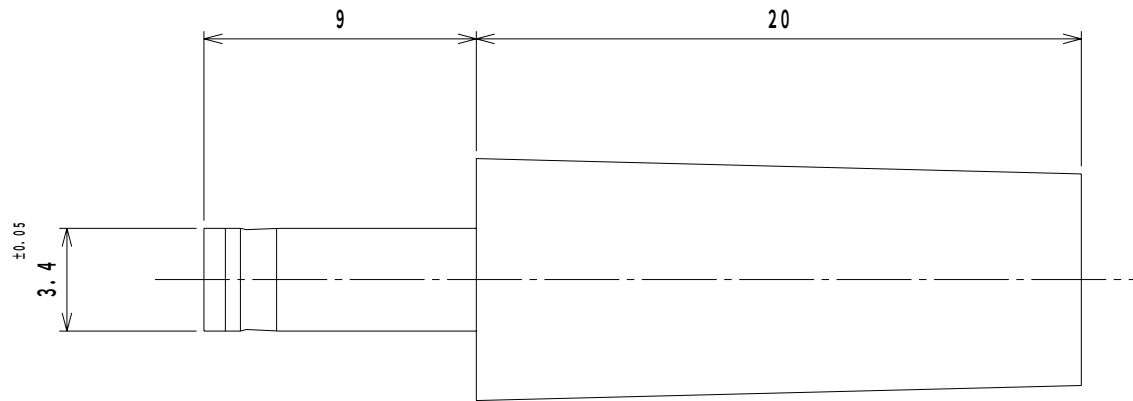

SPECIFICATION

RATING: DC12V 0.5A

DIELECTRIC STRENGTH:500V AC FOR ONE MINUTE.

INSULATION RESISTANCE:100MΩ MIN AT 500V DC.

8	CAP	ABS	1			TOLERANCE	SCALE	DATE	DESIG	DRAW	INSPE	APRO
7	TERMINAL-B	BSR	1	Ni		±0.3	4/1	01/5/25		N, I		
6	TERMINAL-A	BSR	1	Ni								
5	INSULATOR-C	POLYCARBONATE	1			MODEL		QTY	PART NAME		DC PLUG	
4	CONTACT-B	BSBM	1	Ni		型式			品名		No. MP-121WK	
3	INSULATOR-B	PVC	1			MATERIAL			DRAW. NO		MP121WK	
2	CONTACT-A	BSBM	1	Ni		材質			図番			
1	INSULATOR-A	EBONITE	1			FINISH			EST [®] MARUSHIN ELECTRIC MFG. CO., LTD.			
LET	PART NAME	MATERIAL	QTY	FINISH	NORT	処理						