



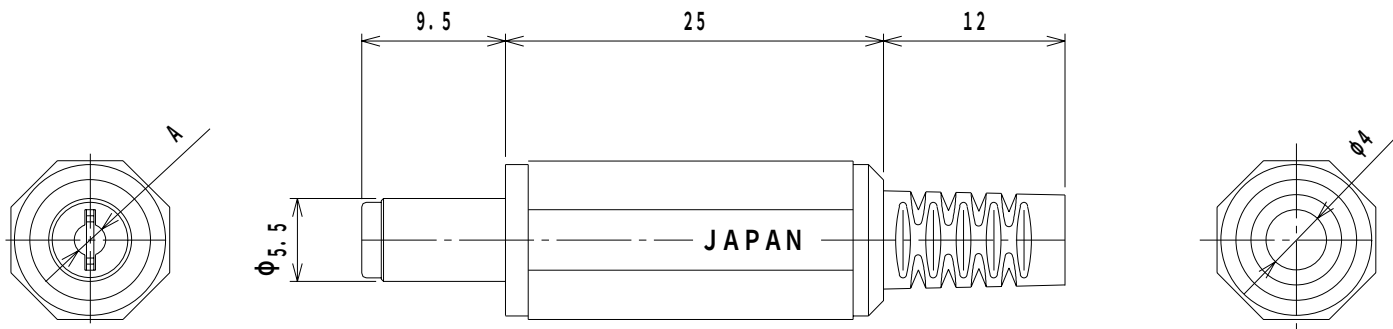

A	
MP-121CF	(φ 2.1)
MP-122CF	(φ 2.5)

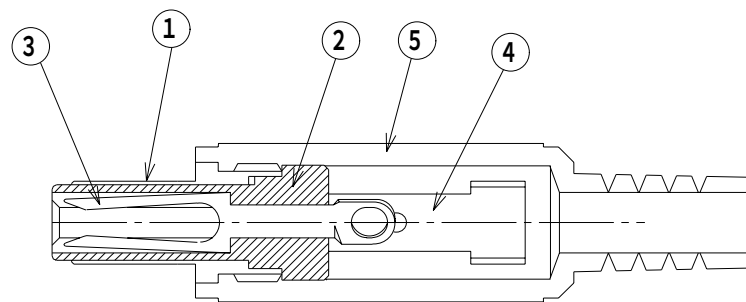

SPECIFICATION

1. RATING : DC12V 4A
2. DIELECTRIC STRENGTH:
500V AC for 1 minute
3. INSULATION REGISTANCE:
100M ohm min. AT 500V DC
4. CONTACT REGISTANCE:
30m ohm MAX.

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
±0.3	2/1	12/11/25	K. S	N. I	K. S	N. I

5	CAP	PE	1			MODEL		QTY	PART NAME	DC PLUG
4	TERMINAL	STEEL	1	Ni		型式			品名	MP-121CF/MP-122CF
3	CONTACT	PBS	1	Ni		MATERIAL			DRAW. NO	MP121CF-E
2	INSULATOR	POM	1			材質			図番	
1	SLEEVE METAL	BSBM	1	Ni		FINISH				
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	処理				



MARUSHIN ELECTRIC MFG. CO., LTD.