




Section A-A

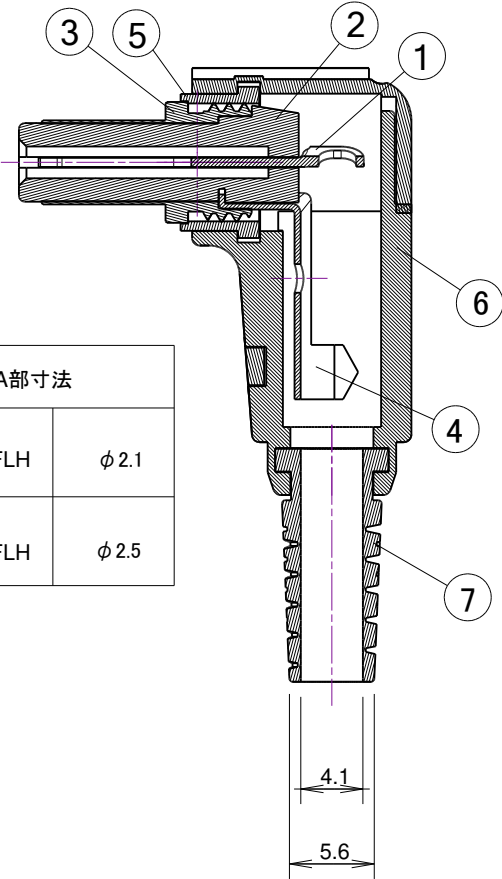

A部寸法	
MP-121FLH	φ 2.1
MP-122FLH	φ 2.5

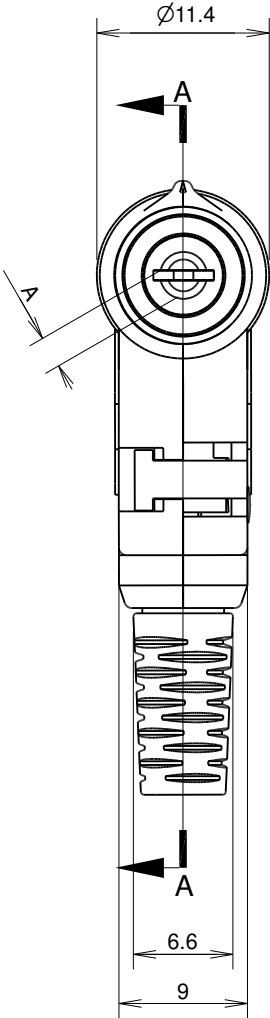

REVISIONS				
ZONE	COUNT	DESCRIPTION	DATE	APPROVED

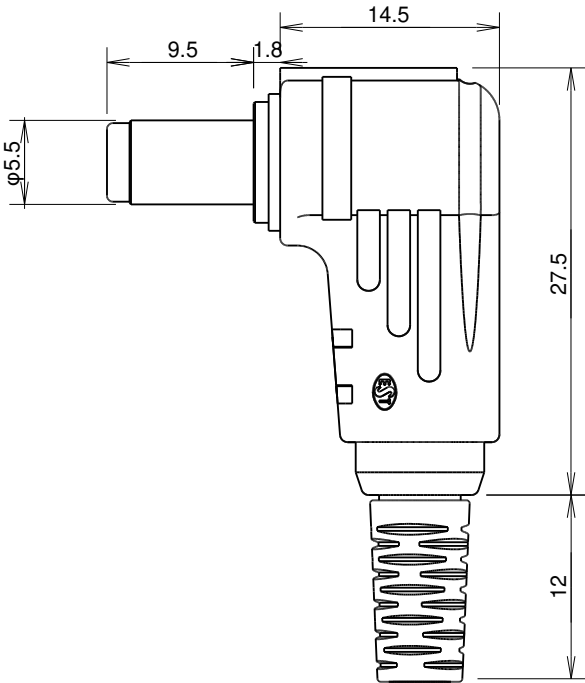

SPECIFICATION 仕様

- 1.RATING 定格
- : DC 12V 6A DC24V 3A
- 2.DIELECTRIC STRENGTH 耐電圧
- : AC500V 1 minute
- 3.INSULATION RESISTANCE 絶縁抵抗
- : DC500V 100MΩ MAX
- 4.CONTACT RESISTANCE 接触抵抗
- : 30mΩ min

7	PROTECTOR	PVC	1		
6	CAP	PP	1		
5	METAL B	BRASS	1	Ni	
4	TERMINAL	STEEL	1	Ni	
3	METAL A	BRASS	1	Ni	
2	INSULATOR	PA	1		
1	CONTACT	PBS	1	Ni	
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE

TOLERANCE	SCALE	DATE	DESIGN	DRAWN	APPROVED / DATE
±0.3	2/1	2025/6/6	N,S	N,S	S,I
MODEL 型式	QTY		PART NAME 品名	MP-121FLH / MP-122FLH	
MATERIAL 材質			DRAW.NO 図番		
FINISH 処理					
			EST MARUSHIN ELECTRIC MFG. CO., LTD.		