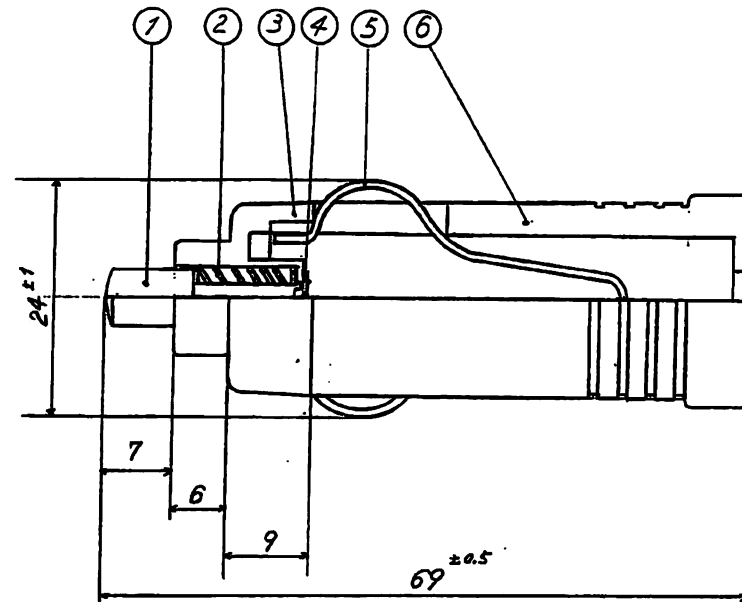
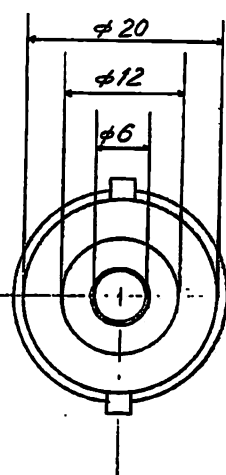


仕 様
SPECIFICATIONS

- 1.定 格 :3A 12V DC
RATING
- 2.接触抵抗 :100mΩ以下
CONTACT RESISTANCE:100mΩMAX.
- 3.絶縁抵抗 :DC250V以下50MΩ以上
INSULATION RESISTANCE:50M Ω MIN AT 250V DC.
- 4.耐圧 :AC250V 1分間
BREAKDOWN VOLTAGE:250V AC FOR 1MINUTE.

TOLERANCE ± 0.3

6	BODY	1	ABS RESIN	
5	CONTACT B	1	STEEL	Ni
4	WASHER	1	BSR	
3	CAP	1	PHENOLIC RESIN	
2	SPRING	1	PIANO WIRE	
1	CONTACT A	1	BSBM	Ni
LET	PART NAME	QTE	MATERIAL	REMARK
DRAWN	<i>M. Yamada</i>	SCALE	<i>2/1</i>	TITLE
CKD	<i>Kogura</i>	3RD ANGLE PROJ		<i>MP129N</i>
APPR		DATE	<i>86.3.20</i>	DRAWN No.

EST MARUSHIN ELECTRIC MFG. CO., LTD. マル信無線電機株式会社