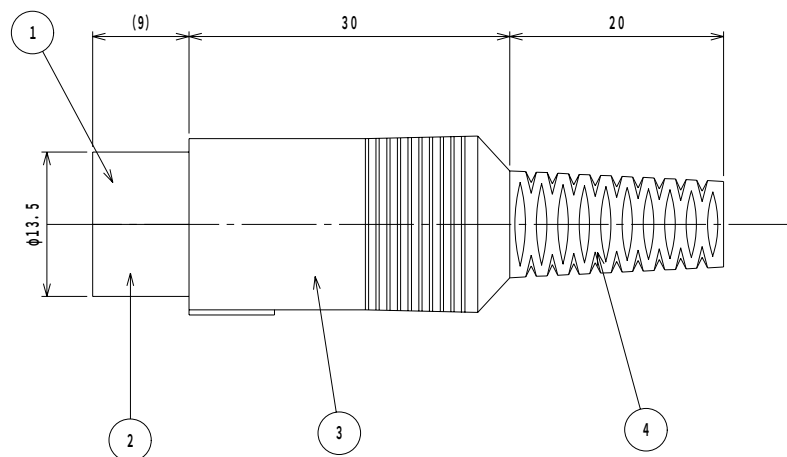



SPECIFICATION

DIELECTRIC STRENGTH:250V AC FOR ONE MINUTE.
INSULATION RESISTANCE:100MΩ MIN. AT 250V DC.
CURRENT CAPACITY:100V AC 1A

No. of Contact	3P	5P	5P	6P	7P	8P
CONTACT CONFIGURATION						
Model	MP130	MP132	MP133	MP016	MP017	MP018

6	CONTACT PIN	BRASS	3-8	Ni	
5	INSULATOR	PBT G=15%	1		
4	PROTECTOR	PVC	1		
3	CAP	PE	1		
2	CONTACT A-2	STEEL	1	Ni	
1	CONTACT A-1	STEEL	1	Ni	
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
±0.3	2/1	92/7/28		N, I		
MODEL 型式	QTY		PART NAME 品名	MP130 - 018		
MATERIAL 材質				DRAW. NO 図番	MP132	
FINISH 処理			EST [®] MARUSHIN ELECTRIC MFG. CO., LTD			