


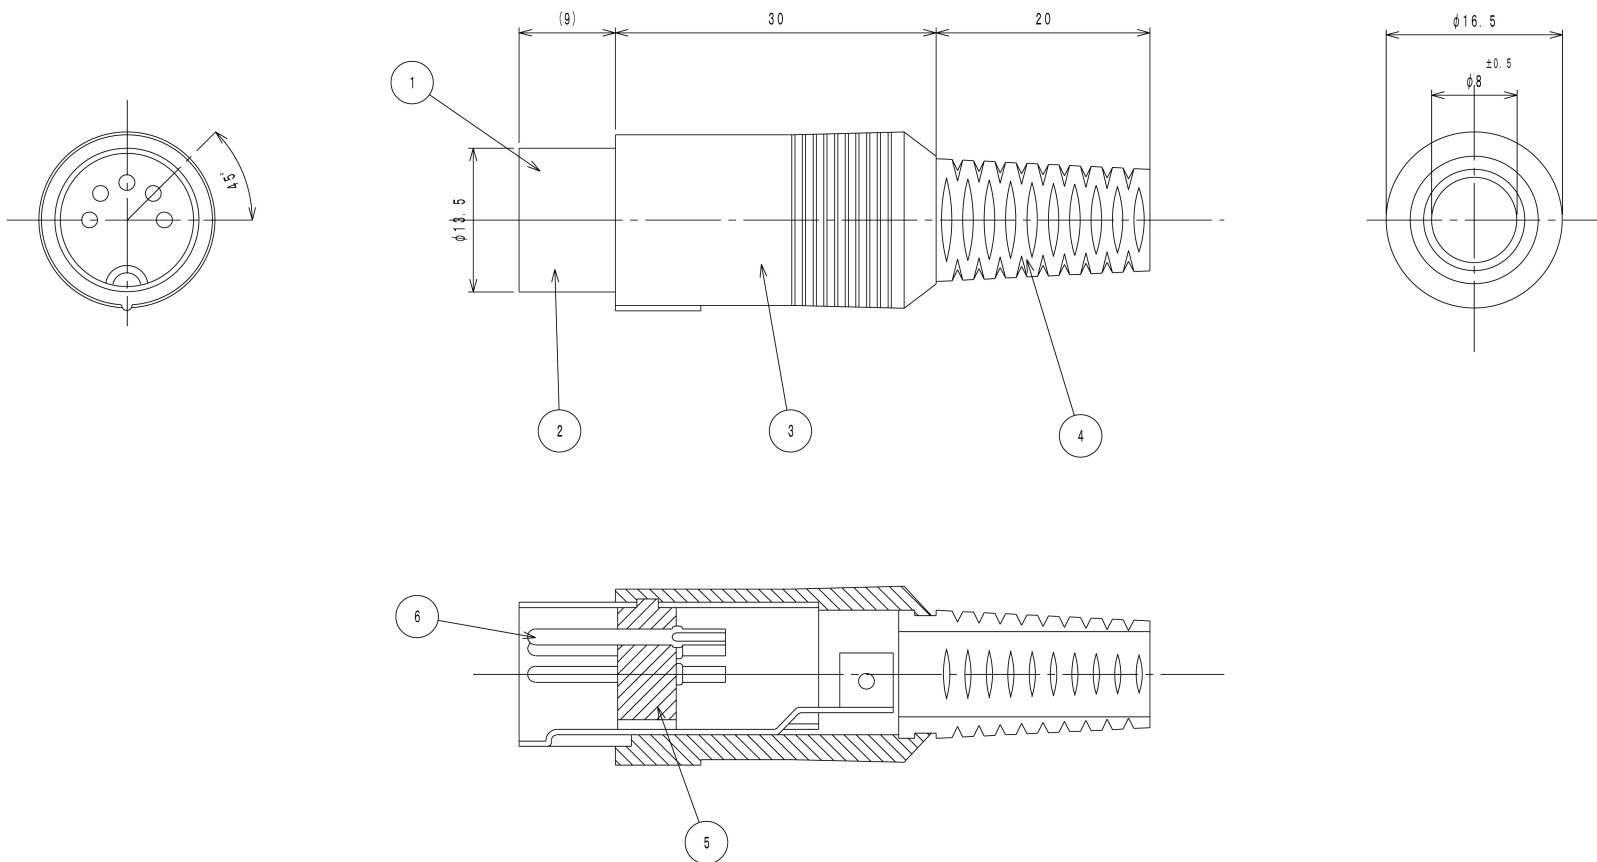

SPECIFICATION

DIELECTRIC STRENGTH: 250V AC FOR ONE MINUTE.
 INSULATION RESISTANCE: 100MΩ MIN. AT 250V DC.
 CURRENT CAPACITY: 100V AC 1A

No. of Contact	3 P	5 P	5 P	6 P	7 P	8 P
CONTACT CONFIGURATION						
Model	MP130/8	MP132/8	MP133/8	MP016/8	MP017/8	MP018/8

6	CONTACT PIN	BRASS	3-8	Ni	
5	INSULATOR	PBT G=15%	1		
4	PROTECTOR	PVC	1		
3	CAP	PE	1		
2	CONTACT A-2	STEEL	1	Ni	
1	CONTACT A-1	STEEL	1	Ni	
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
±0.3	2/1	92/7/28		N, I		
MODEL 型式	QTY		PART NAME 品名	MP132/8 - 018/8		
MATERIAL 材質				DRAW. NO 図番	MP132-8	
FINISH 処理			EST [®] MARUSHIN ELECTRIC MFG. CO., LTD			