

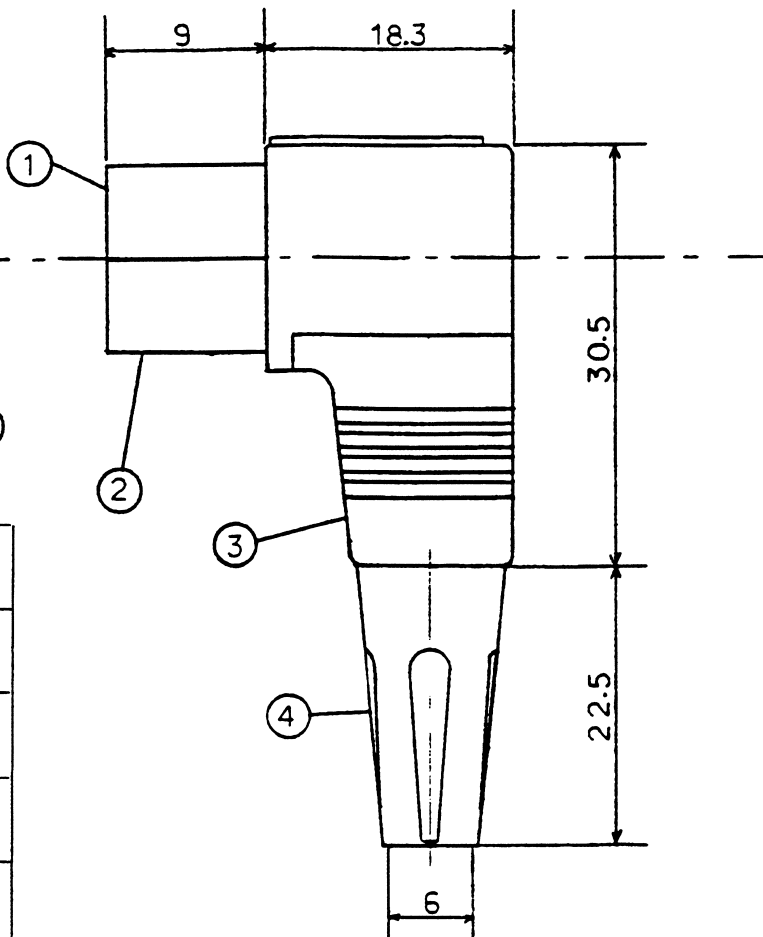


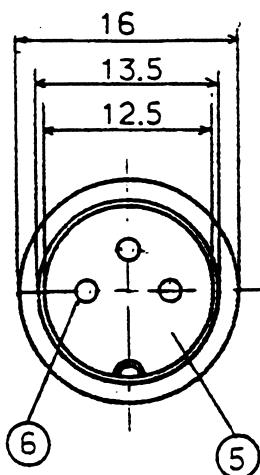

MP-130L	3P	
MP-132L	5P	
MP-133L	5P	
MP-016L	6P	
MP-017L	7P	
MP-018L	8P	



Rating : 1A 100V AC
 Insulation resistance: min. 100MΩ at 500V DC
 Contact resistance : MAX. 30mΩ (initial value)
 Dielectric Strength : 250V AC for 1 minute

6	PIN ($\phi 1.5^{+0}_{-0.02}$)	3-8	BRASS	Ni-P
5	INSULATOR	1	PBT	
4	CABLE PROTECTOR	1	PVC	
3	CAP	1	POLYETHYLENE	
2	CONTACT B	1	STEEL	Ni-P
1	CONTACT A	1	STEEL	Ni-P
LET	PART NAME	QTE	MATERIAL	REMARK

 	DATE	CHANGE	NAME	TRIG.	SCALE	TOLERANCE	DESIG.	DRAW.	INSPE.	APPRO.
						DATE				
				MODEL (型式)	QTY.	PART NAME (品名)				
				MATERIAL (材料)	DIN PLUG					
				FINISH (処理)	MP130L-MP018L					
				DRAW. NO. (図番)					REV. (改版)	