


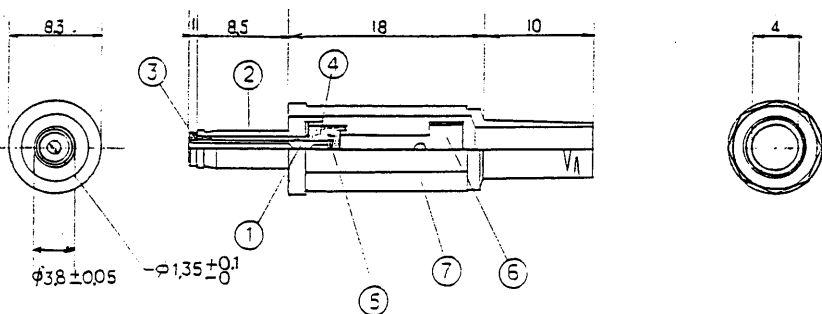

Note:

Insulation Resistance - 100 Megaohm min. @ 500VDC

Dielectric Strength - 500 VAC for one minute

Contact Resistance - 30 miliohm Max.

Rating: 12VDC 1A

Operating Temperature: -25^o to 70^oC.

7	CAP	PP	1						
6	TERMINAL B	BSR	1	Ni					
5	TERMINAL A	BSR	1	Ni					
4	INSULATOR B	PC	1						
3	INSULATOR A	EBONITE	1						
2	CONTACT SPRING	BSBM	1	Ni					
1	CONTACT PIN	BSBM	1	Ni					
LET	PART NAME	MATERIAL	QTY.	FINISH	NOTE				
△	..	TRIG.	SCALE	TOLERANCE	DESIG.	DRAW.	INSPE.	APRO.	
△	..		2/1	DATE					
△	..			1.1.10					
△	..		MODEL (型式)	QTY.	PART NAME (品名)				
△	..		MATERIAL (材料)		MP-138NK				
△	..		FINISH (処理)		DRAW. NO. (図番)		REV.(改版)		
△	..	DATE	CHANGE	NAME					