
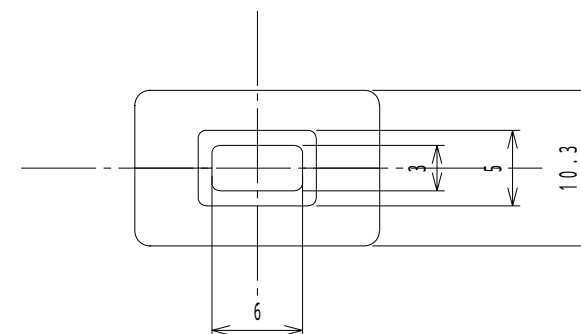


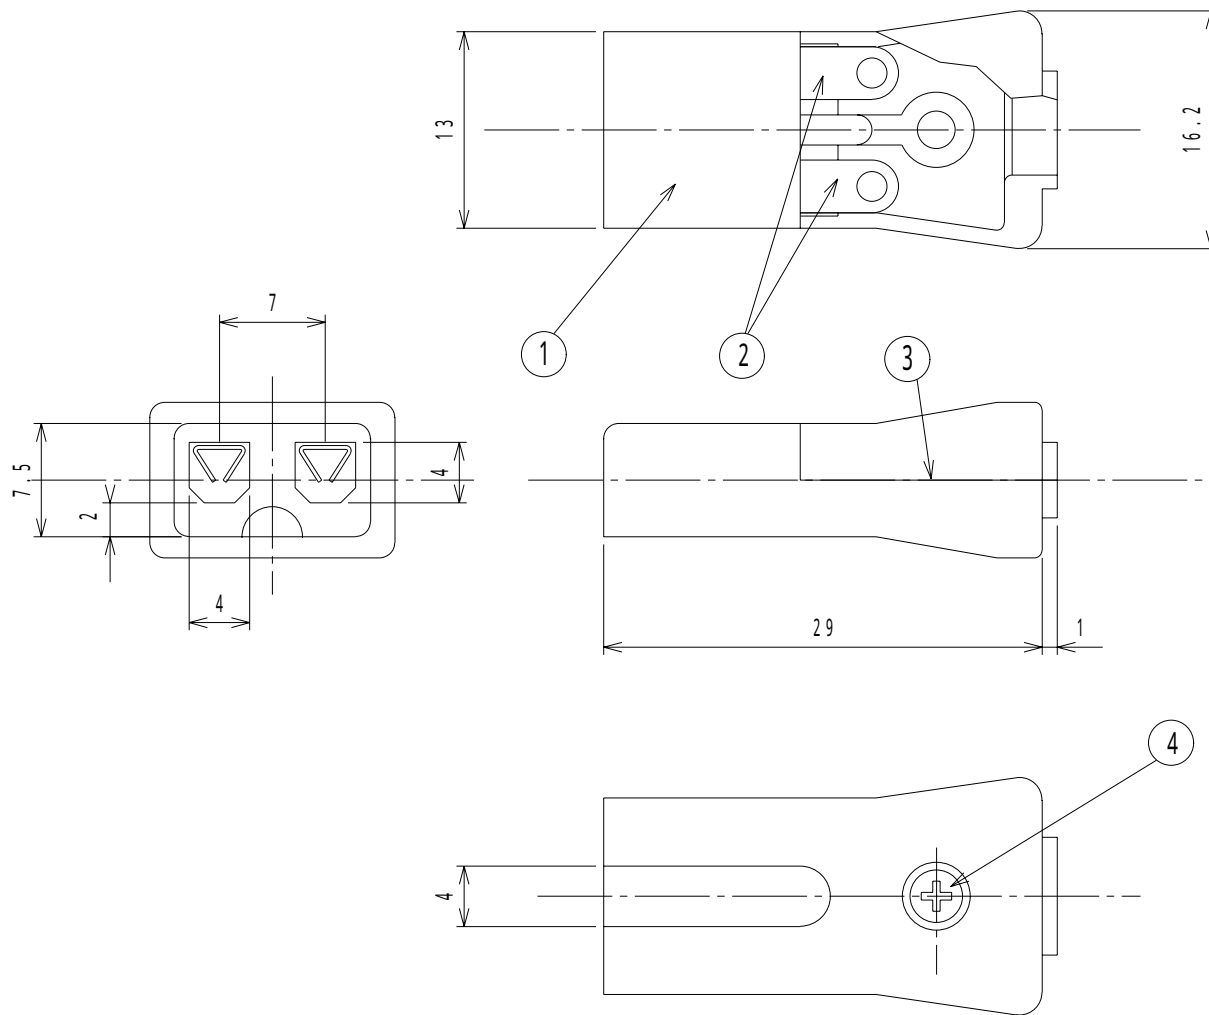

SPECIFICATION 仕様

1. RATING : AC250V 1.5A
定格
2. DIELECTRIC STRENGTH: 500V AC/1MINUTE.
耐電圧 : AC500V 1分間。
3. INSULATION RESISTANCE: 100MΩ MIN/500V DC
絶縁抵抗 : DC500Vにて100MΩ以上。
4. CONTACT RESISTANCE: 30mΩ MAX.
接触抵抗 : 30mΩ以下。(初期値)

4	SCREW ビス	ST	1	Zn		TOLERANCE	SCALE	PART NAME 品名	2 P プラグ No . MP - 1 9 9
3	COVER フタ	PC	1			± 0 . 3	2 / 1	DRAW . NO 図番	MP 1 9 9
2	CONTACT 接続端子	PBS - 1 / 2 H t = 0 . 2 5	2	Ni		DRAW	APRO	EST MARUSHIN ELECTRIC MFG.CO.,LTD.	
1	HOUSING 本体	PC	1			N . I	M . K		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE				