

仕 様

定 格: AC100V 1A / DC12V 1A





絶縁抵抗: DC250Vにて50MΩ以上

耐電圧: AC250V 1分間

接触抵抗: 30mΩ以下

挿入力: 4.5Kg以下

抜去力: 0.9~3Kg

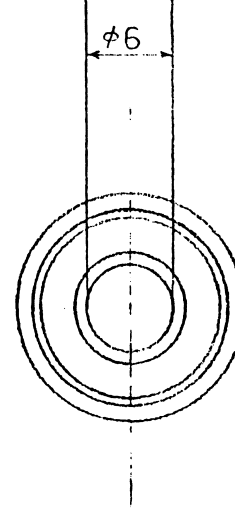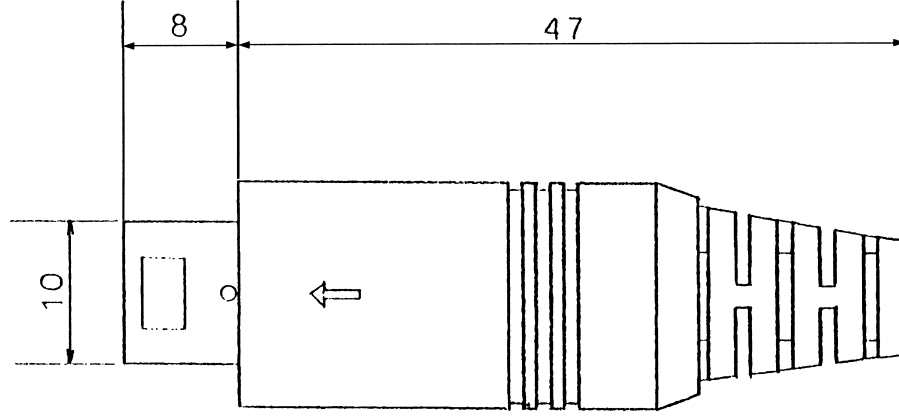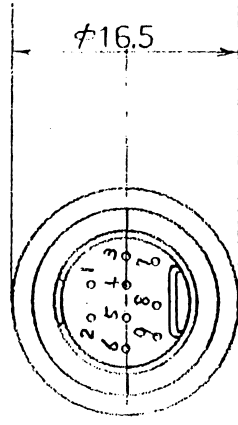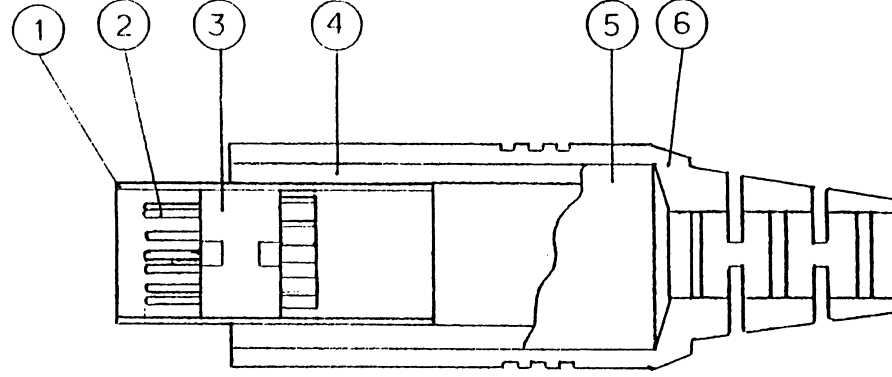

6	CAP	1	PE	
5	CABLE HOLDER B	1	ABS	
4	CABLE HOLDER A	1	ABS	
3	HOUSING	1	PBT	
2	PIN	9	BRASS	SILVER-P
1	METAL SHELL	1	BRASS	NI-P
LET	PART NAME	QTE	MATERIAL	REMARK

TRIG.	SCALE	TOLERANCE	DESIG.	DRAW.	INSPE.	APPRO.
	2/1	±0.3				
MODEL (型式)		QTY.	PART NAME (品名)			
			MINI CIRCULAR CONNECTOR			
MATERIAL (材料)			SOLDER TYPE			
FINISH (処理)			DRAW. NO. (図番)		REV. (改番)	
			MP 371/9			