
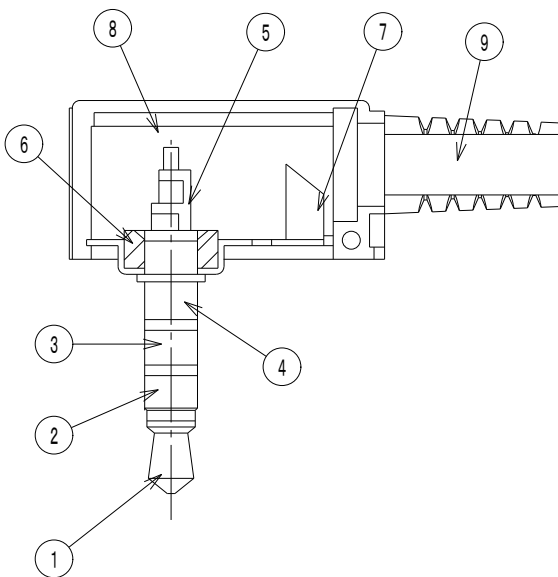


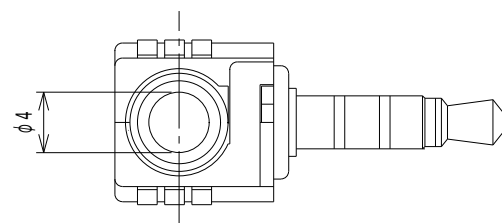

1. 耐電圧 : AC500V 1分間
DIELECTRIC STRENGTH:500V AC FOR ONE MINUTE.

2. 接触抵抗 : 50mΩ以下
CONTACT RESISTANCE:50mΩ MAX.

3. 絶縁抵抗 : DC500Vにて100MΩ以上
INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.

9	CABLE PROTECTOR	PVC	1										
8	CAP	PP	1			TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO	
7	FRAME	BRASS	1	N i		±0. 5	2 / 1	13 / 8 / 30	M. K	N. I			
6	INSULATOR B	POM	1										
5	INSULATOR A	POM	1			MODEL	QTY		PART NAME	No. MP-435LN			
4	CONTACT D	BRASS	1	N i		型式			品名				
3	CONTACT C	BRASS	1	N i		MATERIAL	DRAW. NO 図番 MP435LN						
2	CONTACT B	BRASS	1	N i		材質							
1	CONTACT A	BRASS	1	N i		FINISH	 MARUSHIN ELECTRIC MFG. CO., LTD.						
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	処理							