

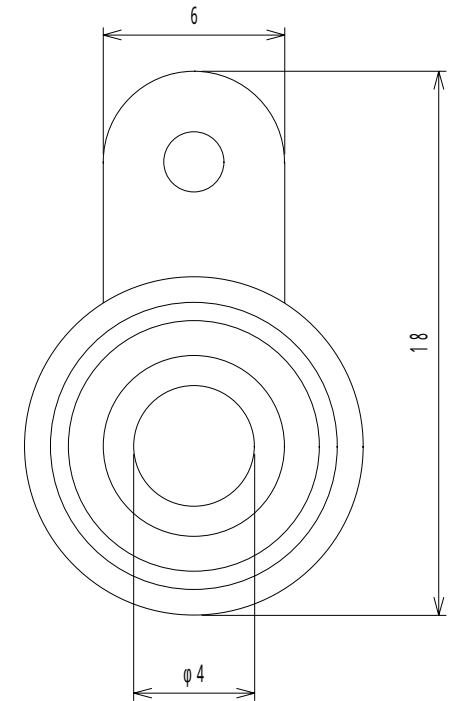
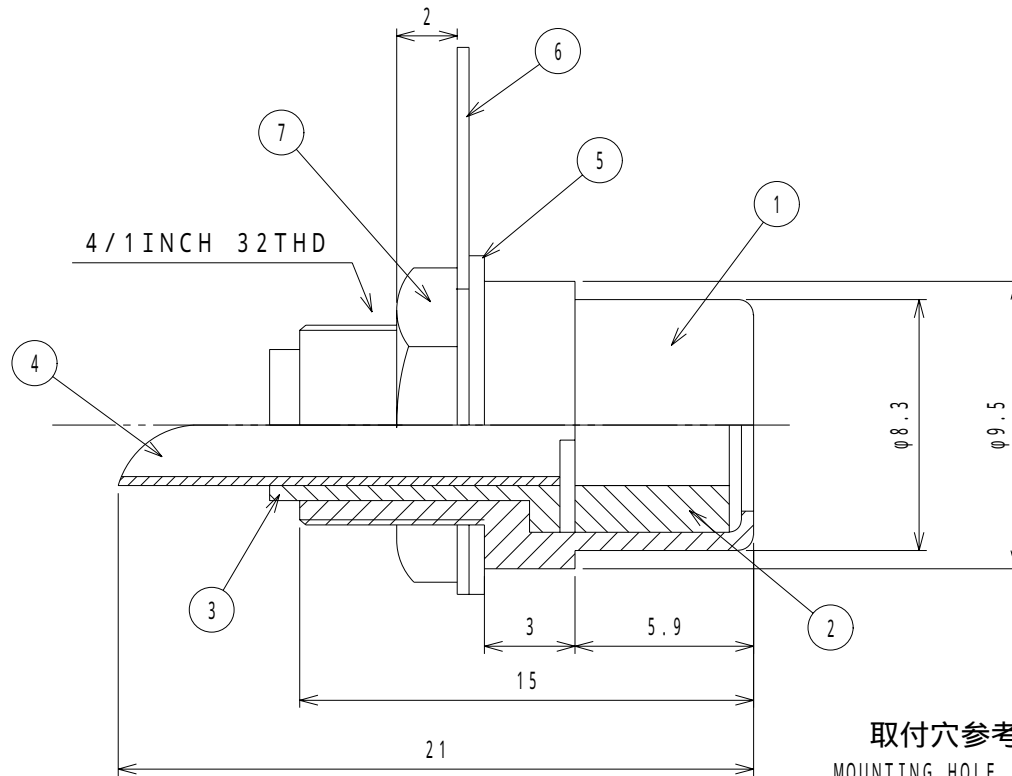


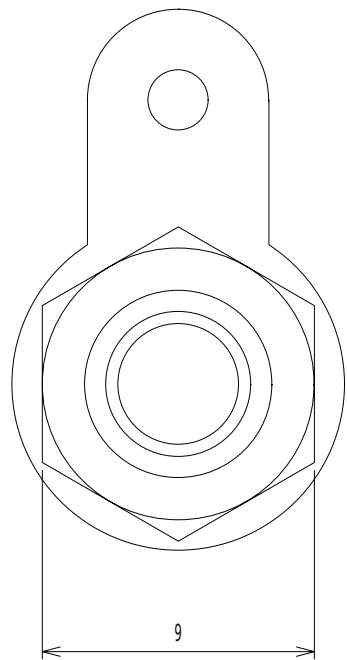

取付穴参考寸法
MOUNTING HOLE DIMENSION



仕様 SPECIFICATION			
定格	RATING	DC12V 1A	12V DC 1A
耐電圧	DIELECTRIC STRENGTH	AC250V 1分間	250VAC FOR ONE MINUTE
絶縁抵抗	INSULATION RESISTANCE	DC500Vにて100MΩ以上	100MΩ MIN. AT DC500V
接触抵抗	CONTACT RESISTANCE	30mΩ以下	30mΩ MAX
挿入力	INSERTION FORCE	30N以下	30N MAX
抜去力	EXTRACTION FORCE	3~30N	3~30N

品番表	
品番	MODEL NO.
MR-565G0	赤 RED
MR-565G1	黒 BLACK
MR-565G2	緑 GREEN
MR-565G5	青 BLUE
MR-565G6	黄 YELLOW
MR-565G7	白 WHITE

TOLERANCE	SCALE	DATE		DESIG	DRAW	INSPE	APRO
± 0 . 3	4 / 1	0 6 / 0 6 / 2 0		M . K	S . I	N . I	N . I
MODEL 型式	QTY		PART NAME 品名	No . MR - 5 6 5 G			
MATERIAL 材質	DRAW.NO 図番				MR 5 6 5 G - R		
FINISH 処理	EST [®] MARUSHIN ELECTRIC MFG.CO.,LTD.						

7	ナット	HEX,NUT	BSBM	1	Ni	
6	端子	TERMINAL	STEEL t=0.4	1	Ni	
5	ワッシャー	WASHER	STEEL t=0.5	1	Ni	
4	コンタクト	CONTACT	BSR	1	Au	
3	絶縁体B	INSULATOR B	ABS	1		
2	絶縁体A	INSULATOR A	ABS	1		
1	本体	BODY	BSBM	1	Au	
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	