
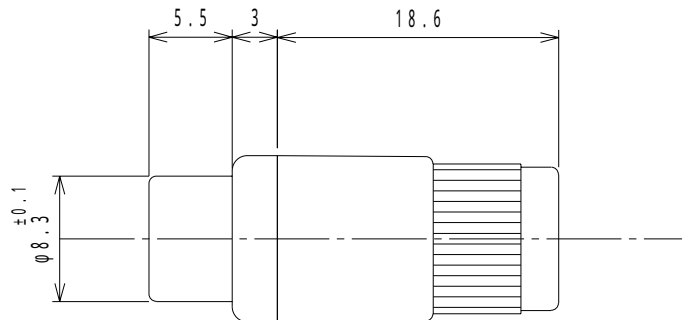
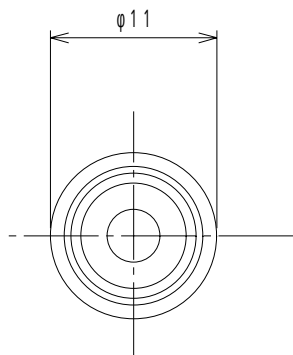


仕 様 SPECIFICATION

定 格 : DC12V 1A
 RATING:DC12V 1A
 耐電圧 : AC250V 1分間
 DIELECTRIC STRENGTH:250V AC/1MINUTE
 絶縁抵抗 : DC250Vにて100MΩ以上
 INSULATION RESISTANCE:100MΩ MIN AT 250V DC
 接触抵抗 : 50mΩ以下
 CONTACT RESISTANCE:50mΩ MAX
 挿入力 : 30N以下
 INSERTION FORCE:30N MAX
 抜去力 : 3~30N
 WITHDRAWAL FORCE:3~30N

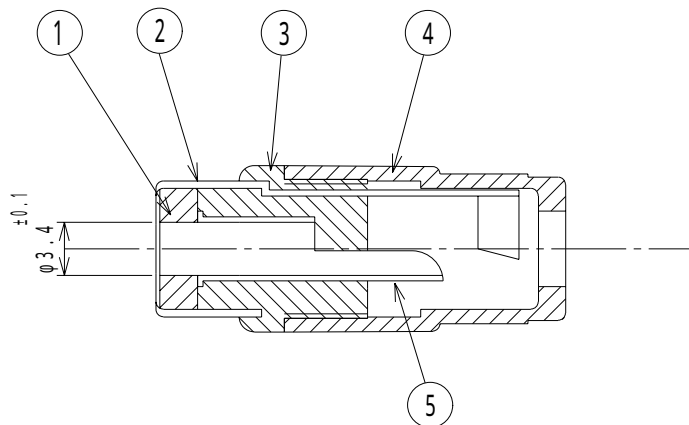

品 番 表	
品 番 MODEL NO.	色 COLOR
MR-569M0	赤 RED
MR-569M1	黒 BLACK
MR-569M2	緑 GREEN
MR-569M4	灰 GREY
MR-569M5	青 BLUE
MR-569M6	黄 YELLOW
MR-569M7	白 WHITE

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
+0.3	2/1	10/8/1		N.I		

5	CONTACT B	BRASS	1	Ni		MODEL	QTY	PART NAME	No. MR-569M
4	CAP	ABS RESIN	1			型式		品名	
3	BODY	ABS RESIN	1			MATERIAL		DRAW.NO	MR569M-E
2	CONTACT A	STEEL	1	Ni		材質		図番	
1	INSULATOR	POM	1			FINISH			
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	処理			

EST MARUSHIN ELECTRIC MFG.CO.,LTD.