


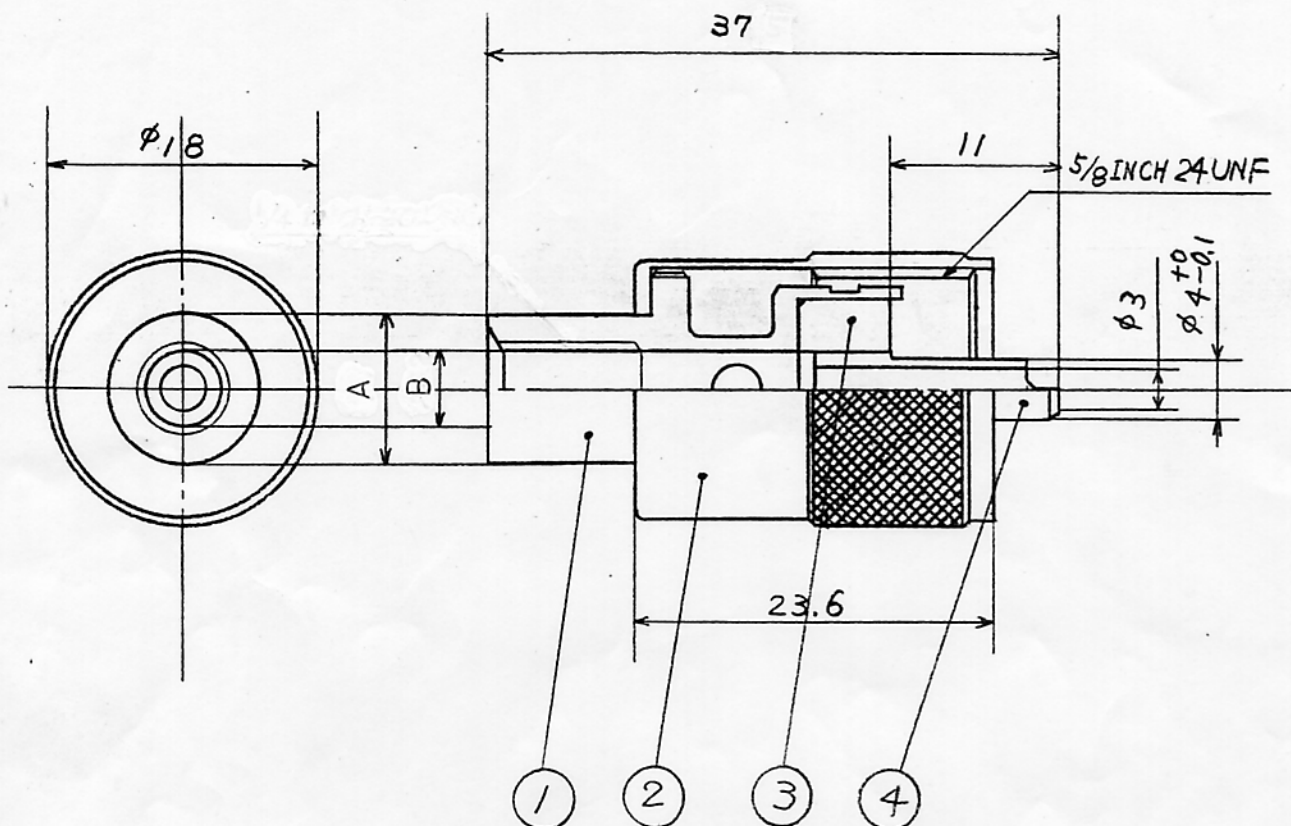

### SPECIFICATIONS

WITHSTAND VOLTAGE : AC1,000V ONE MINUTE.  
 INSULATION RESISTANCE : 100MΩ MIN AT DC500V.  
 CONTACT RESISTANCE : 3mΩ MAX AT DC1A.

|         | A   | B    |
|---------|-----|------|
| MR587/6 | φ10 | φ5.5 |
| MR587/9 | φ13 | φ9.5 |

| 4   | PIN       | BRASS          | 1     | Ag-PLATED      |          |
|-----|-----------|----------------|-------|----------------|----------|
| 3   | INSULATOR | PHENOLIC RESIN | 1     |                |          |
| 2   | RING      | BRASS          | 1     | Ni-PLATED      |          |
| 1   | BODY      | BRASS          | 1     | Ni-PLATED      |          |
| LET | PART NAME | MATERIAL       | Q'TY  | FINISH         | NOTE     |
| ⑧   | ...       | TRIG.          | SCALE | TOLERANCE      | DESIG.   |
| ⑦   | ...       | ⑧              | 2/1   | ±0.3           | DRAW.    |
| ⑥   | ...       |                |       | DATE           | INSPE.   |
| ⑤   | ...       | MODEL (型式)     | QTY.  | PART NAME (品名) | APRO.    |
| ④   | ...       |                |       | MR587/6        |          |
| ③   | ...       | MATERIAL (材料)  |       | MR587/9        |          |
| ②   | ...       | FINISH (処理)    |       | DRAW. NO. (図番) | REV.(改版) |
| ①   | ...       |                |       |                |          |
|     | DATE      | CHANGE         | NAME  |                |          |