


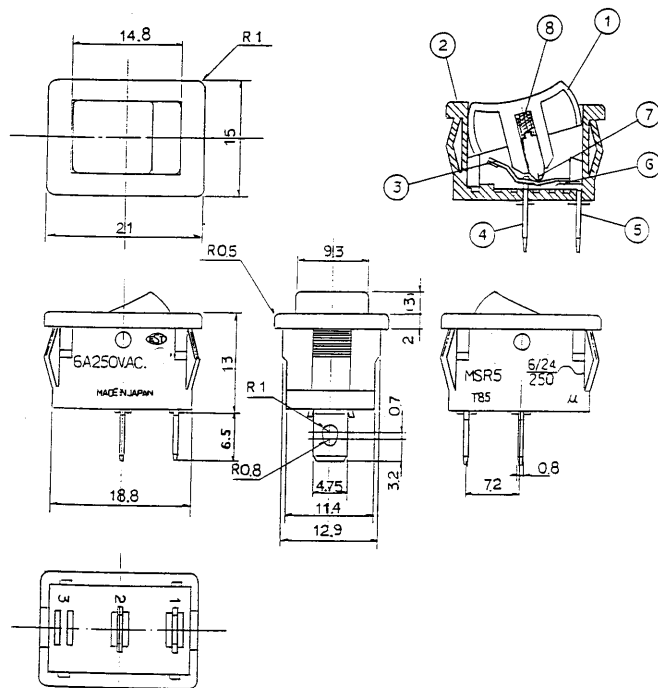

SPECIFICATION

仕様

- 1 CIRCUIT : SPST
回路 : 単極単投
- 2 RATING : MAX AC 250V 6A (IR)
定格 : (抵抗負荷)
- 3 CONTACT RESISTANCE : BELOW 20 MILLIOHMS AT 2~4V DC
接触抵抗 : DC 2~4V 1A時 20mΩ以下
- 4 INSULATION RESISTANCE : OVER 100 MEGOHMS WHEN MEASURED WITH 500V MEGGER
絶縁抵抗 : DC 500V時 100MΩ以上
- 5 DIELECTRIC STRENGTH : AC 2000V 1MIN (BETWEEN TERMINALS)
耐電圧 : AC 4000V 1MIN (TO METAL OUTSIDE HOUSING)
- 6 OPERATING FORCE : 0.2~0.8 kg
動作力
- 7 LIFE TIME : 10,000 CYCLES
耐久性
- 8 OPERATING AMBIENT TEMPERATURE : -25°C ~ +85°C
使用温度
- 9 SOLDERING TEMPERATURE : 280°C 3 sec.
半田付け耐熱

8	5-007	SPRING	FLAT WIRE	1	
7	5-008	PUSH BAR	POLYAMIDE RESIN	1	
6	5-006	CONTACT	SILVER	1	
5	5-003-2	TERMINALS (C)	COPPER	1	SILVER PLATED
4	5-004-2	TERMINALS (A)	COPPER	1	SILVER PLATED
3	5-005	CONDUCT TERMINALS	COPPER	1	SILVER PLATED
2	5-002	ROCK	POLYAMIDE RESIN	1	
1	5-001	KNOB	POLYAMIDE RESIN	1	

No. PART NO PART NAME MATERIAL QTY FINISH NOTE

LET	PART NAME	QTE	MATERIAL	REMARK
DRAWN	1/20	SCALE	TITLE	ロocker スイッチ
CKD		3RD ANGLE PROJ	DRAWN	TYPE NUMBER
APPR		DATE	No.	MSR 3-2

EST MARUSHIN ELECTRIC MFG. CO., LTD. マル信無線電機株式会社