
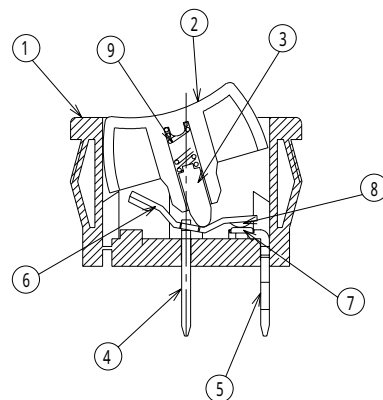
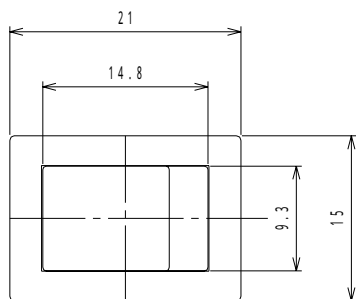


SPECIFICATION

仕 様

- 1 CIRCUIT : SPST
回 路 単極単投
- 2 RATING : MAX AC 250V 10A (IR)
定 格 AC 125V 12A (IR)
(抵抗負荷)
- 3 CONTACT RESISTANCE : BELOW 20 MILL OHMS AT2~4V DC
接 触 抵 抗 DC 2~4V 1Aで20mΩ 以下
- 4 INSULATION RESISTANCE : OVER 100MEG OHMS WHEN MEASURED WITH 500V MEGGER
絶 縁 抵 抗 DC 500Vにて100Mオーム以上
- 5 DIELECTRIC STRENGTH : AC 2000V 1MIN (BETWEEN TERMINALS)
耐 電 圧 AC 2000V 1分間(端子間)
AC 4000V 1MIN(TO METAL OUTSIDE HOUSING)
AC 4000V 1分間(端子-取付板間)
- 6 OPERATING FORCE : 0.2~0.8Kg
動 作 力
- 7 LIFE TIME : 10000 CYCLES
耐 久 性
- 8 OPERATING AMBIENT TEMPERATURE : -25° C ~+85° C
使 用 温 度 範 囲

9	5-004A	SPRING	PIANO WIRE SWPA	1		
8	5-006	CONTACT(B)		1		
7	7-003	CONTACT(A)	SILVER Ag	1		
6	5-005	CONTACT TERMINALS	COPPER Cup-H t=0.5	1	SILVER PLATED Ag-3E	
5	7-002	TERNINALS(B)	COPPER Cup-H t=0.8	1	SILVER PLATED Ag-3E	
4	5-004-2	TERMINALS(A)	COPPER Cup-H t=0.8	1	SILVER PLATED Ag-3E	
3	6-008	PUSH BAR	POLYAMIDE RESIN	1		ASAHI CHEMICAL INDUSTRY.CO,LTD. REONA 1300S. E48285A
2	5-001	KNOB	POLYAMIDE RESIN	1		ASAHI CHEMICAL INDUSTRY.CO,LTD. REONA 1300S. E48285A
1	7-001	BODY	POLYAMIDE RESIN	1		ASAHI CHEMICAL INDUSTRY.CO,LTD. REONA 1300S. E48285A
LET	PART No.	PART NAME	MATERIAL	QTY	FINISH	NOTE

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
	2 / 1	6 / 4 / 6		M , K		
MODEL 型式	QTY		PART NAME 品名	ROCKER SWITCH ロッカースイッチ		
MATERIAL 材質				DRAW.NO 図番	MSR7	
FINISH 処理			EST [®] MARUSHIN ELECTRIC MFG.CO.,LTD.			