


品名 (NAME)

型番 (CAT. NO.)

図番 (DWG. NO.)


16mm 通用タミナル

MT 486H

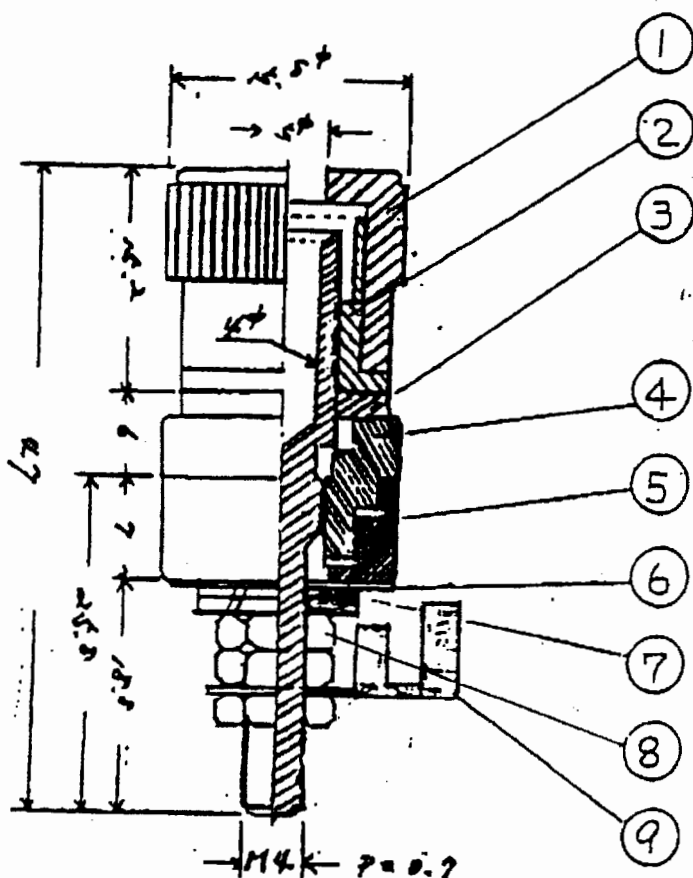

取付孔

HOLE LAYOUT

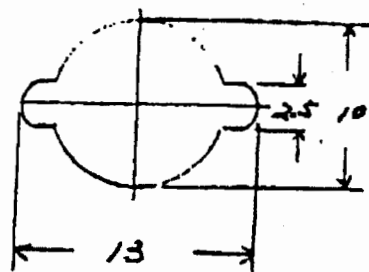

仕 様

NOTE:

定 格: AC125V 10A
 耐電圧: AC1000V 1分間
 絶縁抵抗: DC500V 100MΩ以上

RATING - 125 VAC 10A
 DIELECTRIC STRENGTH - 1000 VAC for one minute
 INSULATION RESISTANCE - 100 Megaohm min.
 @500 VDC

9	TERMINAL	1	BST		
8	NUT	3	SS		
7	SPRING WASHER	2	SPCW	4x14x1	
6	WASHER	1	BSP	4x14x1	
5	HOUSING B	1	赤: PPE、黒: PC	300H	
4	HOUSING A	1	赤: PPE、黒: PC	300H	
3	CENTER METAL	1	BSBM	φ7 x 43	
2	SLEEVE METAL	1	BSBM	φ14 x	
1	KNOB	1	赤: PPE、黒: PC	300H	
部番 (No.)	部 品 名 (PARTS NAME)	個数 (NUM.)	材 質 (MATERIAL)	規 格 (SPECIFICATION)	処 理 (TREATMENT)

設計 (DESIGNED)	図面 (DRAWN)	写原 (TRACE)	図査 (CHK.)	承認 (APP.)
DATE	DATE	DATE	DATE	DATE
単位 (UNIT)	尺 度 (SCALE)	一般公差 (TOLERANCE)	マル信無線電機株式会社	
M/M	2/1	± 0.5		