



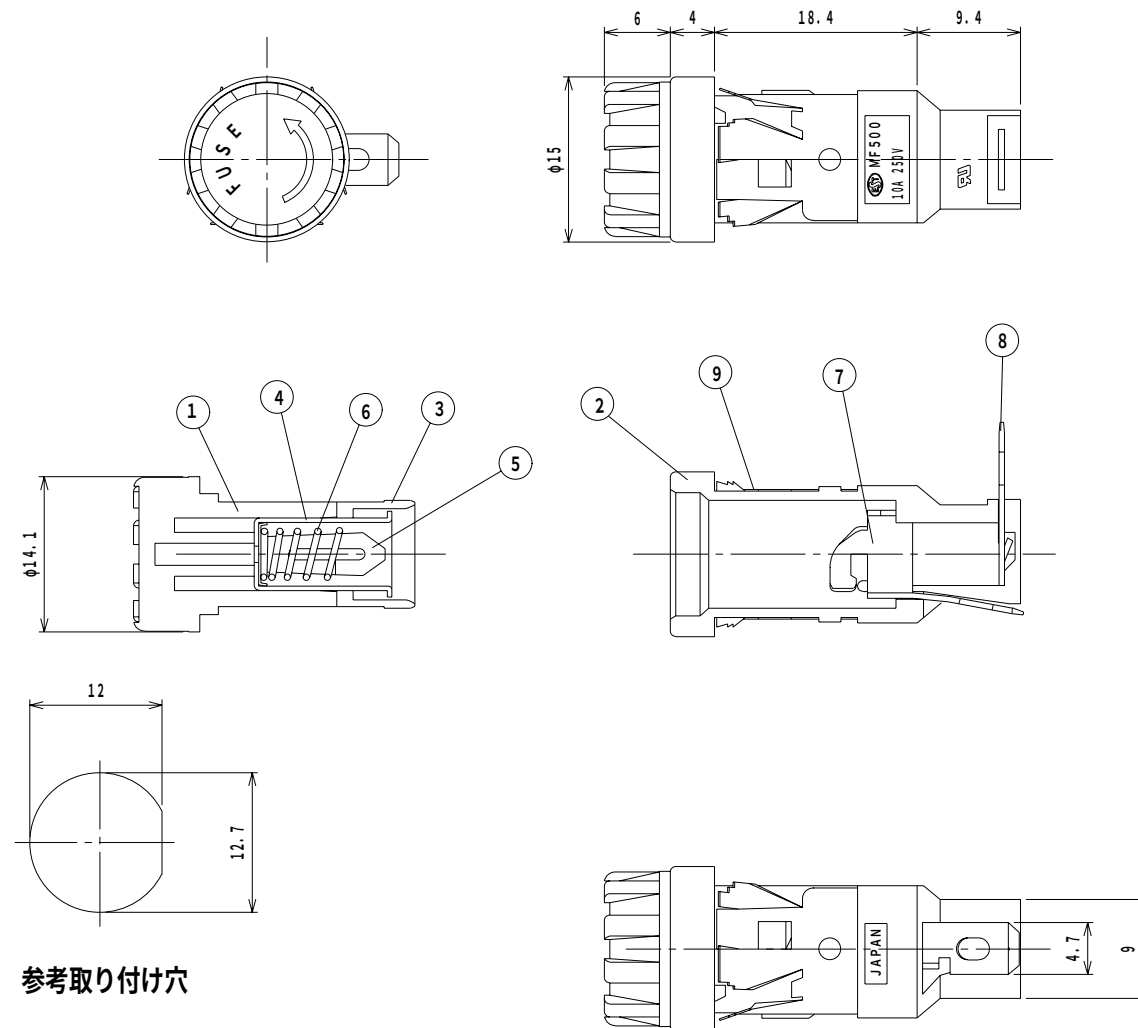

参考取り付け穴



# SPECS:

仕様

- 1) RATING: 10A 250V AC (UL/CSA/VDE)  
 定格 6.3A 250V AC (SEMKO)

## 2) CONTACT RESISTANCE:

接触抵抗 MAX0.01 AT1A DC (BETWEEN TERMINALS)  
 10m 以下 (各端子間)

## 3) INSULATION RESISTANCE:

絶縁抵抗 MIN100M AT500V DC (BETWEEN TERMINALS)  
 DC500Vにて100M 以上 (各端子間)

## 4) INSULATION WITHSTAND VOLTAGE:

耐電圧 WITHOUT BREKE DOWN FOR 1MINUTE OF  
 A TEST POTENTIAL OF AC1500V  
 (BETWEEN TERMINALS)

AC1500V 1分間 (各端子間)

## 5) FUSE TYPE: φ5.2X20mm

適合ヒューズ\*

|     |         |            |            |     |        |      |  |  |  |  |  |  |
|-----|---------|------------|------------|-----|--------|------|--|--|--|--|--|--|
| 9   |         | HOLDERS    | SUS t=0.15 | 1   |        |      |  |  |  |  |  |  |
| 8   |         | TERMINAL C | BSR t=0.5  | 1   | Sn     |      |  |  |  |  |  |  |
| 7   |         | TERMINAL B | BSR t=0.5  | 1   | Sn     |      |  |  |  |  |  |  |
| 6   |         | SPRING A   | PIANO WIRE | 1   | NI     |      |  |  |  |  |  |  |
| 5   |         | SPRING B   | PBS        | 1   | Sn     |      |  |  |  |  |  |  |
| 4   |         | TERMINAL A | BSR t=0.4  | 1   | Sn     |      |  |  |  |  |  |  |
| 3   |         | RING       | PC         | 1   |        |      |  |  |  |  |  |  |
| 2   |         | BODY       | PBT G20%   | 1   |        |      |  |  |  |  |  |  |
| 1   |         | CAP        | PBT G20%   | 1   |        |      |  |  |  |  |  |  |
| LET | PART No | PART NAME  | MATERIAL   | QTY | FINISH | NOTE |  |  |  |  |  |  |

|           |       |         |        |      |       |      |
|-----------|-------|---------|--------|------|-------|------|
| TOLERANCE | SCALE | DATE    | DESING | DRAW | INSPE | APRO |
|           | 2/1   | 3/12/25 |        | M, K |       |      |

|          |     |           |                   |
|----------|-----|-----------|-------------------|
| MODEL    | QTY | PART NAME | MF500H            |
| 型式       |     | 品名        | スナップ インヒューズ ホルダ ー |
| MATERIAL |     | DRAW. NO  | MF500H            |
| 材質       |     | 図番        |                   |
| FINISH   |     |           |                   |
| 処理       |     |           |                   |

|     |                                  |
|-----|----------------------------------|
| EST | MARUSHIN ELECTRIC MFG. CO., LTD. |
|-----|----------------------------------|